




EXCELLENT PLASTIC PACKAGING
INDUSTRY SOLUTIONS
优秀的塑料包装行业解决方案



EXCELLENT PLASTIC PACKAGING INDUSTRY SOLUTIONS

优秀的塑料包装行业解决方案

www.chinazxin.com



浙江铸信机械有限公司
ZHEJIANG ZHUXIN MACHINERY CO.,LTD

⑨ 浙江省温州市平阳县宋桥镇章桥村粮油东路118号
Liangyou East Road 118, Zhangqiao.Wanquan
Town, Pingyang County, Wenzhou City, China
☎ 0577-63081111 63778111 63776555
Ⓜ +86- (0) 13655772222
✉ 0577-63778011
✉ admin@zhuxin.cn admin@chinazxin.com



www.chinazxin.com

浙江铸信机械有限公司
ZHEJIANG ZHUXIN MACHINERY CO.,LTD



Lead the industry for 30 years and continue to surpass ourselves

引领行业30年
不断超越自我

Established in 1989, Zhuxin Machinery Co., Ltd. has been the symbol of high quality and excellent service in machinery areas for many years. Our factory is located in Pingyang County, and close to the 104 National Highway. It is about 40 km away from Wenzhou Airport. We researched and developed our machines on basis of advanced technology introduced from developed countries. As a professional and experienced manufacturer in China, we are able to produce many kinds of machines like Film Blowing Machine, Blown Film Machine, Plastic Extruder Machine, Film Extrusion Machine Bag Making Machine, Paper Bag Making Machine, Packing Machine, Printing Machine and Leather & Shoe Cutting Machines etc.

铸信机械强力依托服务至上的经营战略和科学高效的管理运作，始终致力于“弘扬创业精神、打造民族品牌”。目前铸信的产品涵盖吹膜机、制袋机、纸袋机、印刷机、透明膜三维包装机（带防伪易拉线）和皮革机械等产品，产品畅销全国及亚、非、欧等30多个国家和地区。铸信愿与国内外各界朋友携手前进、再创辉煌！

Fine Quality Management Mode

精细化品质管理

Through the concerted efforts of all employees for many years, Casting has continued to grow and develop, and has established and improved sales channels and after-sales service networks throughout the country, and is committed to providing more comprehensive business integrated services to our customers.

通过全体员工多年的同心协力，铸信不断发展壮大，在全国各地创建并完善销售渠道及售后服务网络，致力于为广大客户提供更加全面的商务综合服务。



About Us 关于我们

Accredited by ISO9001, CE certificates, you are ensured the quality of every Zhuxin machine. Inheriting the spirit of "to achieve perfection, build integrity", we provide lifelong maintenance for all the machines we sell. Our machines have a ready market both at home and abroad, and we still try our best to provide better quality and service to all regular and new customers. We would like to cooperate with our friends and develop together. All friends at home and abroad are warmly welcome!

在机械领域里，“铸信”人凭借对先进技术的不断研究和应用，使自身得到了飞速的发展。铸信机械有着近二十年的机械设计制造经验，已通过CE、ISO9001国际质量体系认证并取得进出口自营权。本着“铸造精品、经营诚信”的服务理念，铸信机械对所有售出产品均提供终身维护，同时，根据客户的不同生产条件、不同生产能力，无偿提供科学、经济、便捷的工程预算方案。以强大的技术支持，想客户所想，引领客户走向成功。



Focus on technological breakthroughs 专注技术突破

Highly adaptable process, diversified materials, widely used in blown film machine and bag making machine industry. The equipment is efficient, intelligent and integrated.

高适应的过程，材料多样化，广泛应用于吹膜机、制袋机行业。设备高效化、智能化、一体化。

广泛的应用领域 为您创造无限可能

The competition lies in manufacturing capacity and ability, lies in advanced equipment.

市场竞争的基础，离不开生产实力，离不开完善先进的硬件设施。

Updated Equipment

不断的更新设备



Sincerity/ Always sincerely.
So you can trust.

诚信/以诚为本，专注专信



Manufacturing Capacity
and Ability
生产实力



THREE-LAYER

CO-EXTRUSION INTERNAL BUBBLE COOLING
HAUL-OFF ROTARY FILM PRODUCT LINE

三层共挤牵引旋转膜泡内冷吹膜机



DRIP DETAILS CAST HIGH QUALITY

点滴细节 铸就高端品质

OPTIONAL EQUIPMENT 选择性配备

Auto Loader	自动吸料机
Corona Treater	电晕处理
Air compressor	空气压缩机
Air cooling device	冷风机
Air Shaft	气胀轴

MAIN TECHNICAL PARAMETERS 主要技术参数

Model	型号	3SJ-50	3SJ-55	3SJ-65
Suitable material	通用材料	HDPE LDPE LLDPE	HDPE LDPE LLDPE	HDPE LDPE LLDPE
Film width	产品宽度	800-1200mm	1000-1500mm	1200-2000mm
Film thickness	产品厚度	0.028-0.20mm	0.028-0.20mm	0.03-0.20mm
Max. Extrusion output	最大产量	120kg/hr	150kg/hr	200kg/hr
Extruder	挤出机	挤出机	挤出机	挤出机
Screw diameter	螺杆直径	φ50x3	φ55 Bφ60 Cφ55	φ60 Bφ65 Cφ60
Screw l/d length	螺杆长径比	28:1/30:1	28:1/30:1	28:1/30:1
Screw material	螺杆材料	Sacm-645/38 Crmoala	Sacm-645/38 Crmoala	Sacm-645/38 Crmoala
Cylinder material	料筒材料	Sacm-645/38 Crmoala	Sacm-645/38 Crmoala	Sacm-645/38 Crmoala
Cylinder cooling	料筒冷却	370Wx2/3	370Wx2/3	550Wx3/3
Driving motor	主机功率	15kwx3	A18.5+B22+C18.5	A22+B30+C22
Temperature control	料筒温度控制	3x3	3x3	3x3
Average-power consume	平均耗电量	80kw	95kw	120kw
Type of die	模头	模头	模头	模头
Die size	模口	280mm	350mm	500mm
Temperature control	温度控制	4	4	4
Air ring	风环	1	1	1
Air blower	风机	7.5kw	11kw	15kw
Take-up unit	引取装置	引取装置	引取装置	引取装置
Roller width	牵引辊宽	1600mm	2100mm	2600mm
Take-up speed	引取速度	5-50m/min	5-50m/min	5-50m/min
Take-up motor	引取电机功率	1.5kw	2.2kw	2.2kw
Winding unit	卷取装置	卷取装置	卷取装置	卷取装置
Type	表面摩擦式	Surface friction type	Surface friction type	Surface friction type
Winding motor	卷取功率	1.5kw	2.2kw	2.2kw
Winding speed	卷取速度	5-50m/min	5-50m/min	5-50m/min
Outline dimension(LxWxH)	外形尺寸 (LxWxH)	9.5x4.5x7.5m	10.5x5.0x9m	11.5x5.5x10m

机器外观及技术参数如有更改，恕不另行通知。未经铸信公司明确书面许可，不得翻印或传播有关资料。
Zhuxin is continuously seeking for development of their products, for this reason, Zhuxin reserves the right to supply the improved products without prior notice.

3SJ-G

3SJ-G SERIES THREE-LAYER CO-EXTRUSION ROTARY DIE HEAD FILM BLOWING MACHINE SET

3SJ-G系列三层共挤旋转机头吹膜机组



OPTIONAL EQUIPMENT 选择性配备

Auto Loader	自动吸料机
Corona Treater	电晕处理
Air compressor	空气压缩机
Air cooling device	冷风机
Air Shaft	气胀轴

MAIN TECHNICAL PARAMETERS 主要技术参数

Model	型号	3SJ-50	3SJ-55	3SJ-65
Suitable material	通用材料	HDPE LDPE LLDPE	HDPE LDPE LLDPE	HDPE LDPE LLDPE
Film width	产品宽度	800-1200mm	1000-1500mm	1200-2000mm
Film thickness	产品厚度	0.028-0.20mm	0.028-0.20mm	0.03-0.20mm
Max. Extrusion output	最大产量	120kg/hr	150kg/hr	200kg/hr
Extruder	挤出机	挤出机	挤出机	挤出机
Screw diameter	螺杆直径	φ50x3	Aφ55 Bφ60 Cφ55	Aφ60 Bφ65 Cφ60
Screw l/d length	螺杆长径比	28:1/30:1	28:1/30:1	28:1/30:1
Screw material	螺杆材料	Sacm-64S/38 Crmoala	Sacm-64S/38 Crmoala	Sacm-64S/38 Crmoala
Cylinder material	料筒材料	Sacm-64S/38 Crmoala	Sacm-64S/38 Crmoala	Sacm-64S/38 Crmoala
Cylinder cooling	料筒冷却	370Wx2/3	370Wx2/3	550Wx2/3
Driving motor	主机功率	15kwx3	A18.5+B22+C18.5	A22+B30+C22
Temperature control	料筒温度控制	3x3	3x3	3x3
Average-power consume	平均耗电量	80kw	95kw	120kw
Type of die	模头	模头	模头	模头
Die size	模口	280mm	350mm	500mm
Temperature control	温度控制	4	4	4
Air ring	风环	1	1	1
Air blower	风机	3kw	5.5kw	5.5kw
Center steady stick	中心稳定棒	1	1	
Take-up unit	引取装置	引取装置	引取装置	引取装置
Roller width	牵引辊宽	1300mm	1600mm	2100mm
Take-up speed	引取速度	5-50m/min	5-50m/min	5-50m/min
Take-up motor	引取电机功率	1.5kw	2.2kw	2.2kw
Winding unit	卷取装置	卷取装置	卷取装置	卷取装置
Type	表面摩擦式	Surface friction type	Surface friction type	Surface friction type
Winding motor	卷取功率	1.5kw	2.2kw	2.2kw
Winding speed	卷取速度	5-50m/min	5-50m/min	5-50m/min
Power supply	电源	380V, 50HZ, 3PHASE	380V, 50HZ, 3PHASE	380V, 50HZ, 3PHASE
Outline dimension(lxwxh)	外形尺寸 (LxWxH)	9.5x4.5x7.5m	10.5x5.0x9m	11.5x5.5x10m

机器外观及技术参数如有更改，恕不另行通知。未经铸信公司明确书面许可，不得翻印或传播有关资料。
Zhuxin is continuously seeking for development of their products, for this reason, Zhuxin reserves the right to supply the improved products without prior notice.

2SJ-G

2SJ-G SERIES DOUBLE-LAYER CO-EXTRUSION ROTARY DIE HEAD FILM BLOWING MACHINE SET

2SJ-G系列两层共挤旋转机头吹膜机组



OPTIONAL EQUIPMENT 选择性配备

Auto Loader	自动吸料机
Corona Treater	电晕处理
Air compressor	空气压缩机
Air cooling device	冷风机
Air Shaft	气胀轴

MAIN TECHNICAL PARAMETERS 主要技术参数

Model	型号	2SJ-50	2SJ-55	2SJ-60
Suitable material	通用材料	HDPE LDPE LLDPE	HDPE LDPE LLDPE	HDPE LDPE LLDPE
Film width	产品宽度	600-1200mm	800-1500mm	1000-1500mm
Film thickness	产品厚度	0.03-0.20mm	0.03-0.20mm	0.03-0.20mm
Max. Extrusion output	最大产量	80kg/hr	120kg/hr	150kg/hr
Extruder	挤出机	挤出机	挤出机	挤出机
Screw diameter	螺杆直径	φ50x2	φ55x2	φ60x2
Screw l/d length	螺杆长径比	28:1/30:1	28:1/30:1	28:1/30:1
Screw material	螺杆材料	Sacm-645/38 Crmoala	Sacm-645/38 Crmoala	Sacm-645/38 Crmoala
Cylinder material	料筒材料	Sacm-645/38 Crmoala	Sacm-645/38 Crmoala	Sacm-645/38 Crmoala
Cylinder cooling	料筒冷却	370Wx2	550Wx2	550Wx2
Driving motor	主机功率	15kwx2	18.5kwx2	22kwx2
Temperature control	料筒温度控制	3	3	4
Average-power consume	平均耗电量	55kw	68kw	90kw
Type of die	模头	模头	模头	模头
Die size	模口	φ220mm	φ250mm	φ350mm
Temperature control	温度控制	3	3	4
Air ring	风环	1	1	1
Air blower	风机	3kw	5.5kw	7.5kw
Center steady stick	中心稳定棒	1	1	1
Take-up unit	引取装置	引取装置	引取装置	引取装置
Roller width	牵引辊宽	1100mm	1600mm	2000mm
Effective width	有效引取膜宽度	1000mm	1500mm	1800mm
Height adjustable	升降调节距离	800mm	800mm	800mm
Take-up speed	引取速度	10-65m/min	10-65m/min	10-65m/min
Take-up motor	引取电机功率	1.5kw	1.5kw	2.2kw
Winding unit	卷取装置	卷取装置	卷取装置	卷取装置
Type	表面摩擦式	Surface friction type	Surface friction type	Surface friction type
Winding motor	卷取功率	10N.m	16N.m	18N.m
Winding speed	卷取速度	10-65m/min	10-65m/min	10-65m/min
Power supply	电源	380V, 50HZ, 3PHASE	380V, 50HZ, 3PHASE	380V, 50HZ, 3PHASE
Outline dimension(LxWxH)	外形尺寸 (LxWxH)	6.5x5.5x5.5m	7.5x5.8x7.5m	7.8x6.4x8m

机器外观及技术参数如有更改，恕不另行通知。未经铸信公司明确书面许可，不得翻印或传播有关资料。
Zhuxin is continuously seeking for development of their products, for this reason, Zhuxin reserves the right to supply the improved products without prior notice.

ABA SERIES

FILM BLOWING MACHINE

ABA系列吹膜机

www.chinazxin.com



OPTIONAL EQUIPMENT 选择性配备

Auto Loader	自动吸料机
Corona Treater	电晕处理
Air compressor	空气压缩机
Air cooling device	冷风机
Air Shaft	气胀轴

MAIN TECHNICAL PARAMETERS 主要技术参数

Model	型号	2SJABA-900	2SJABA-1100	2SJABA-1300
Suitable material	通用材料	HDPE LDPE LLDPE	HDPE LDPE LLDPE	HDPE LDPE LLDPE
Film width	产品宽度	400-800mm	500-1000mm	600-1200mm
Film thickness	产品厚度	0.03-0.20mm	0.03-0.20mm	0.03-0.20mm
Max. Extrusion output	最大产量	HAPE: 80kg/hr LDPE:120kg/hr	HAPE: 100kg/hr LDPE:150kg/hr	HAPE: 120kg/hr LDPE:180kg/hr
Extruder	挤出机	挤出机	挤出机	挤出机
Screw diameter	螺杆直径	φ50x2	φ55x2	φ55x1 φ65x1
Screw l/d length	螺杆长径比	28:1/30:1	28:1/30:1	28:1/30:1
Screw material	螺杆材料	Sacm-645/38 Crmoala	Sacm-645/38 Crmoala	Sacm-645/38 Crmoala
Cylinder material	料筒材料	Sacm-645/38 Crmoala	Sacm-645/38 Crmoala	Sacm-645/38 Crmoala
Cylinder cooling	料筒冷却	370Wx2	370Wx2	370Wx2
Driving motor	主机功率	15kwx2	18.5kwx2	22kwx1 18.5kwx1
Gearbox	齿轮箱	146x2	173x2	173x1 180x1
Temperature control	料筒温度控制	3	3	3
Average-power consume	平均耗电量	30kw	35kw	40kw
Type of die	模头	模头	模头	模头
Die size	模口	LDPE: 180 HDPE: 80	LDPE: 220 HDPE: 100	LDPE: 250 HDPE: 120
Temperature control	温度控制	3	3	3
Air ring	风环	2	2	2
Air blower	风机	3kwx1	4kwx1	5.5kwx1
Center steady stick	中心稳定棒	2	2	2
Take-up unit	引取装置	引取装置	引取装置	引取装置
Roller width	牵引辊宽	900mm	1100mm	1300mm
Effective width	有效引取膜宽度	800mm	1000mm	1200mm
Height adjustable	升降调节距离	800mm	800mm	800mm
Take-up speed	引取速度	10-65m/min	10-65m/min	10-65m/min
Take-up motor	引取电机功率	1.5kw	1.5kw	2.2kw
Winding unit	卷取装置	卷取装置	卷取装置	卷取装置
Type	表面摩擦式	Surface friction type	Surface friction type	Surface friction type
Winding motor	卷取功率	16N.m	16N.m	16N.m
Winding speed	卷取速度	10-65m/min	10-65m/min	10-65m/min
Power supply	电源	380V, 50HZ, 3PHASE	380V, 50HZ, 3PHASE	380V, 50HZ, 3PHASE
Outline dimension(LxWxH)	外形尺寸 (LxWxH)	4.8x3.2x5.5m	5x3.5x6m	5x3.7x7.5m

机器外观及技术参数如有更改，恕不另行通知。未经铸信公司明确书面许可，不得翻印或传播有关资料。
Zhuxin is continuously seeking for development of their products, for this reason, Zhuxin reserves the right to supply the improved products without prior notice.

PP

FILM BLOWING MACHINE

PP 吹膜机



OPTIONAL EQUIPMENT 选择性配备

Auto Loader	自动吸料机
Corona Treater	电晕处理
Air compressor	空气压缩机
Rotary Die Head	旋转模头



**DRIP DETAILS
CAST HIGH QUALITY**
点滴细节 铸就高端品质

MAIN TECHNICAL PARAMETERS 主要技术参数

Model	型号	SJ-PP 50	SJ-PP 55	SJ-PP 65
Suitable material	通用材料	PP	PP	PP
Film width	产品宽度	100-500mm	150-600mm	200-800mm
Film thickness	产品厚度	0.03-0.11mm	0.03-0.11mm	0.03-0.11mm
Max. Extrusion output	最大产量	30kg/hr	45kg/hr	60kg/hr
Screw diameter	螺杆直径	φ50	φ55	φ65
Screw l/d length	螺杆长径比	28:1/30:1	28:1/30:1	28:1/30:1
Cylinder cooling	料筒冷却	370Wx2	370Wx2	370Wx3
Main motor	主机功率	11kw	15kw	22kw
Die size	模口	φ150	φ200	φ250
Air blower	风机	1.5kw	2.2kw	2.2kw
Roller width	牵引辊宽	600mm	700mm	900mm
Take-up speed	引取速度	5-60m/min	5-60m/min	5-60m/min
Take-up motor	引取电机功率	0.75kw	1.1kw	1.5kw
Winding motor	卷取功率	10N.m	10N.m	16N.m
Winding speed	卷取速度	5-60m/min	5-60m/min	5-60m/min
Power supply	电源	380V, 50HZ, 3PHASE	380V, 50HZ, 3PHASE	380V, 50HZ, 3PHASE
Outline dimension(LxWxH)	外形尺寸 (LxWxH)	3.2x2.3x5m	4.2x2.5x4m	4.6x2.8x4.5m

机器外观及技术参数如有更改，恕不另行通知。未经铸信公司明确书面许可，不得翻印或传播有关资料。
Zhuxin is continuously seeking for development of their products, for this reason, Zhuxin reserves the right to supply the improved products without prior notice.

SJ-B

FILM BLOWING MACHINE

SJ-B吹膜机



OPTIONAL EQUIPMENT 选择性配备

Auto Loader	自动吸料机
Corona Treater	电晕处理
Rotary Die Head	旋转模头
Air Compressor	空气压缩机
Mechanics Screen Changer	快换网装置
Double Winder	双收卷
Air Shaft	气胀轴



MAIN TECHNICAL PARAMETERS 主要技术参数

Model	型号	SJ-B75	SJ-B100
Suitable material	通用材料	HDPE LLDPE	HDPE LLDPE
Film width	产品宽度	700-1500mm	1200-2000mm
Film thickness	产品厚度	0.008-0.1mm	0.008-0.1mm
Max. Extrusion Output	最大产量	70kg/hr	100kg/hr
Extruder	挤出机	80kg/hr	150kg/hr
Screw diameter	螺杆直径	φ75	φ100
Screw l/d length	螺杆长径比	28:1/30:1	28:1/30:1
Screw material	螺杆材料	Sacm-64S/38 Crmoala	Sacm-64S/38 Crmoala
Cylinder material	料筒材料	Sacm-64S/38 Crmoala	Sacm-64S/38 Crmoala
Cylinder cooling	料筒冷却	550Wx3	550Wx3
Main motor	主机功率	30-37kwx3	45-55kwx3
Temperature control	料筒温度控制	4	5
Average power consume	平均耗电量	40kw	60kw
Type of die	模头	φ150	模头
Die Size	模口	φ350	φ500
temperature control	温度控制	3	4
Air ring	风环	1	1
Air blower	风机	5.5kw	7.5kw
Center steady stick	中心稳定棒	1	1
Take-up unit	引取装置	1600mm	2100mm
Roller width	牵引辊宽	1600mm	2000mm
Effective width	有效引取膜宽度	1500mm	2000mm
Take-up speed	引取速度	10-50m/min	10-50m/min
Take-up motor	引取电机功率	1.5kw	2.2kw
Winding unit	卷取装置	Surface friction type	Surface friction type
Type	表面摩擦式	25N.m	25N.m
Winding motor	卷取功率	10-50m/min	10-50m/min
Winding speed	卷取速度	380V, 50HZ, 3PHASE	380V, 50HZ, 3PHASE
Power supply	电源	63x7.5m	7.1x3.5x9m
Outline dimension(LxWxH)	外形尺寸 (LxWxH)	4T	5.7
weight	重量		

机器外观及技术参数如有更改，恕不另行通知。未经铸信公司明确书面许可，不得翻印或传播有关资料。
Zhuxin is continuously seeking for development of their products, for this reason, Zhuxin reserves the right to supply the improved products without prior notice.

SJ-H

ELEVATOR ROTARY HEAD PE FILM BLOWING MACHINE

SJ-H系列升降旋转机头吹膜机



www.chinazxin.com



OPTIONAL EQUIPMENT 选择性配备

Auto Loader	自动吸料机
Corona Treater	电晕处理
Rotary Die Head	旋转模头
Air Compressor	空气压缩机
Mechanics Screen Changer	快换网装置
Double Winder	双收卷
Air Shaft	气胀轴

MAIN TECHNICAL PARAMETERS 主要技术参数

Model	型号	SJ-H45	SJ-H50	SJ-H55	SJ-H60	SJ-H65
Suitable material	通用材料	HDPE LDPE LLDPE	HDPE LDPE LLDPE	HDPE LDPE LLDPE	HDPE LDPE LLDPE	HDPE LDPE LLDPE
Film width	产品宽度	100-500mm	300-600mm	400-800mm	500-1000mm	600-1200mm
Film Thickness	HD	0.009-0.10mm	0.009-0.10mm	0.009-0.15mm	0.009-0.15mm	0.009-0.15mm
	LD	0.02-0.15mm	0.02-0.15mm	0.03-0.15mm	0.03-0.15mm	0.03-0.15mm
Film Thickness	HD	35kg/hr	40kg/hr	50kg/hr	55kg/hr	65kg/hr
	LD	40kg/hr	45kg/hr	60kg/hr	70kg/hr	80kg/hr
Extruder	挤出机	挤出机	挤出机	挤出机	挤出机	挤出机
Screw diameter	螺杆直径	φ45	φ50	φ55	φ60	φ65
Screw l/d length	螺杆长径比	28:1/30:1	28:1/30:1	28:1/30:1	28:1/30:1	28:1/30:1
Screw material	螺杆材料	Sacm-64S/38 Crmoala	Sacm-64S/38 Crmoala	Sacm-64S/38 Crmoala	Sacm-64S/38 Crmoala	Sacm-64S/38 Crmoala
Cylinder material	料筒材料	Sacm-64S/38 Crmoala	Sacm-64S/38 Crmoala	Sacm-64S/38 Crmoala	Sacm-64S/38 Crmoala	Sacm-64S/38 Crmoala
Cylinder cooling	料筒冷却	370Wx1	370Wx2	370Wx2	370Wx2	370Wx2
Main motor	主机功率	11kw	15kw	15kw	22kw	22kw
Temperature control	料筒温度控制	3	3	3	4	4
Average power consume	平均耗电量	12kw	18kw	22kw	25kw	30kw
Type of die	模头	模头	模头	模头	模头	模头
Die Size	HD	φ60	φ80	φ80	φ100	φ100
	LD	φ100	φ120	φ180	φ200	φ220
temperature control	温度控制	3	3	3	3	3
Air ring	风环	1	1	1	1	1
Air blower	风机	1.5kw	1.5kw	2.2kw	3kw	3kw
Center steady stick	中心稳定棒	1	1	1	1	1
Take-up unit	引取装置	引取装置	引取装置	引取装置	引取装置	引取装置
Roller width	牵引辊宽	600mm	700mm	900mm	1100mm	1300mm
Effective width	有效引取膜宽度	500mm	600mm	800mm	1000mm	1200mm
Height adjustable	升降调节距离	800mm	800mm	800mm	800mm	800mm
Take-up speed	引取速度	10-100m/min	10-100m/min	10-100m/min	10-80m/min	10-80m/min
Take-up motor	引取电机功率	0.75kw	1.1kw	1.5kw	1.5kw	1.5kw
Winding unit	卷取装置	卷取装置	卷取装置	卷取装置	卷取装置	卷取装置
Type	表面摩擦式	Surface friction type	Surface friction type	Surface friction type	Surface friction type	Surface friction type
Winding motor	卷取功率	6N.m	10N.m	10N.m	16N.m	16N.m
Winding speed	卷取速度	10-100m/min	10-100m/min	10-80m/min	10-80m/min	10-80m/min
Power supply	电源	380V, 50HZ, 3PHASE	380V, 50HZ, 3PHASE	380V, 50HZ, 3PHASE	380V, 50HZ, 3PHASE	380V, 50HZ, 3PHASE
Outline dimension(LxWxH)	外形尺寸 (LxWxH)	3.8x2.0x4.1m	5.0x2.2x4.5m	5.5x2.5x5.2m	5.8x2.8x6.3m	5.8x2.8x6.3m

机器外观及技术参数如有更改，恕不另行通知。未经铸信公司明确书面许可，不得翻印或传播有关资料。
Zhuxin is continuously seeking for development of their products, for this reason, Zhuxin reserves the right to supply the improved products without prior notice.

SJ-A

SJ-A SERIES HD/LDPE FILM BLOWING MACHINE

SJ-A系高低压吹膜机



GUSSET 插边机



OPTIONAL EQUIPMENT 选择性配备

Auto Loader	自动吸料机
Corona Treater	电晕处理
Rotary Die Head	旋转模头
Air Compressor	空气压缩机
Mechanics Screen Changer	快换网装置
Double Winder	双收卷
Air Shaft	气胀轴



MAIN TECHNICAL PARAMETERS 主要技术参数

Model	型号	SJ-A45	SJ-A50	SJ-A55	SJ-A60	SJ-A65
Suitable material	通用材料	HDPE LDPE LLDPE	HDPE LDPE LLDPE	HDPE LDPE LLDPE	HDPE LDPE LLDPE	HDPE LDPE LLDPE
Film width	产品宽度	100-500mm	300-600mm	400-800mm	500-1000mm	600-1200mm
Film Thickness	产品厚度	0.009-0.10mm	0.009-0.10mm	0.009-0.15mm	0.009-0.15mm	0.009-0.15mm
		0.02-0.15mm	0.02-0.15mm	0.03-0.15mm	0.03-0.15mm	0.03-0.15mm
Max. Extrusion Output	最大产量	35kg/hr	40kg/hr	50kg/hr	55kg/hr	55kg/hr
		45kg/hr	50kg/hr	60kg/hr	70kg/hr	70kg/hr
Extruder	挤出机	挤出机	挤出机	挤出机	挤出机	挤出机
Screw diameter	螺杆直径	φ45	φ50	φ55	φ60	φ65
Screw l/d length	螺杆长径比	28:1/30:1	28:1/30:1	28:1/30:1	28:1/30:1	28:1/30:1
Screw material	螺杆材料	Sacm-645/38 Crmoala	Sacm-645/38 Crmoala	Sacm-645/38 Crmoala	Sacm-645/38 Crmoala	Sacm-645/38 Crmoala
Cylinder material	料筒材料	Sacm-645/38 Crmoala	Sacm-645/38 Crmoala	Sacm-645/38 Crmoala	Sacm-645/38 Crmoala	Sacm-645/38 Crmoala
Cylinder cooling	料筒冷却	370Wx1	370Wx2	370Wx2	370Wx2	370Wx2
Main motor	主机功率	11kw	15kw	18.5kw	22kw	22kw
Temperature control	料筒温度控制	3	3	3	4	4
Average power consume	平均耗电量	12kw	18kw	20kw	25kw	30kw
Type of die	模头	模头	模头	模头	模头	模头
Die Size	模口	φ60	φ80	φ80	φ100	φ100
		φ100	φ120	φ180	φ200	φ220
temperature control	温度控制	3	3	3	3	3
Air ring	风环	1	1	1	1	1
Air blower	风机	1.5kw	1.5kw	2.2kw	3kw	3kw
Center steady stick	中心稳定棒	1	1	1	1	1
Take-up unit	引取装置	引取装置	引取装置	引取装置	引取装置	引取装置
Roller width	牵引辊宽	600mm	700mm	900mm	1100mm	1300mm
Effective width	有效引取膜宽度	500mm	600mm	800mm	1000mm	1200mm
Height adjustable	升降调节距离	800mm	800mm	800mm	800mm	800mm
Take-up speed	引取速度	10-100m/min	10-100m/min	10-100m/min	10-80m/min	10-80m/min
Take-up motor	引取电机功率	0.75kw	1.1kw	1.5kw	1.5kw	1.5kw
Winding unit	卷取装置	卷取装置	卷取装置	卷取装置	卷取装置	卷取装置
Type	表面摩擦式	Surface friction type	Surface friction type	Surface friction type	Surface friction type	Surface friction type
Winding motor	卷取功率	6N.m	10N.m	10N.m	16N.m	16N.m
Winding speed	卷取速度	10-100m/min	10-100m/min	10-80m/min	10-80m/min	10-80m/min
Power supply	电源	380V, 50HZ, 3PHASE	380V, 50HZ, 3PHASE	380V, 50HZ, 3PHASE	380V, 50HZ, 3PHASE	380V, 50HZ, 3PHASE
Outline dimension(LxWxH)	外形尺寸 (LxWxH)	3.8x2.0x4.1m	5.0x2.2x4.5m	5.5x2.5x5.2m	5.8x2.8x6.3m	5.8x2.8x6.3m

机器外观及技术参数如有更改，恕不另行通知。未经铸信公司明确书面许可，不得翻印或传播有关资料。
Zhuxin is continuously seeking for development of their products, for this reason, Zhuxin reserves the right to supply the improved products without prior notice.

SJ-60(70)

SJ-60(70) SINGLE-SCREW
DOUBLE-DIE FILM BLOWING MACHINE SET

SJ-60(70)单螺旋双模头吹膜机组



MAIN TECHNICAL PARAMETERS 主要技术参数

Model	型号	SJ-60	SJ-70
Screw diameter	螺杆直径	φ60	φ70
L/d	螺杆长径比	28.1/30:1	28.1/30:1
Reduced diameter of film	薄膜折径(mm)	100-500	100-600
Single-face thickness of film	薄膜单面厚度(mm)	0.005-0.08	0.005-0.08
Rational speed of screw stem	螺杆转速(rpm)	10-120	10-120
Power of main motor	主机功率(kw)	22	30
Heating power	加热功率(kw)	15	25
Output	产量(kg/h)	40-60	60-70
Outline dimension(lxwxh)	外形尺寸(mm)	6200x3000x3200	6500x3200x3300
weight	机重(T)	2.3	2.5

机器外观及技术参数如有更改，恕不另行通知。未经铸信公司明确书面许可，不得翻印或传播有关资料。
Zhuxin is continuously seeking for development of their products, for this reason, Zhuxin reserves the right to supply the improved products without prior notice.

SJ-40DX2X600

DOUBLE-COLOUR FILM BLOWING MACHINE SET

SJ-40DX2X600型双色吹塑薄膜机组

MAIN TECHNICAL PARAMETERS 主要技术参数

Model	型号	SJ-40DX2x500
Screw diameter	螺杆直径	40x2
Screw l/d length	螺杆长径比	28.1/30:1
Screw speed	螺旋转速(mm)	10-100
Main output	最大挤出量(kg/h)	30
Max folding width of film	薄膜折径(mm)	500
Single sided thickness of film	薄膜单面厚度(mm)	0.006-0.06
Power of main motor	主机功率(kw)	11
Outline dimension(lxwxh)	外形尺寸(mm)	3800x2000x2800
weight	机重(kg)	2200

机器外观及技术参数如有更改，恕不另行通知。未经铸信公司明确书面许可，不得翻印或传播有关资料。
Zhuxin is continuously seeking for development of their products, for this reason, Zhuxin reserves the right to supply the improved products without prior notice.



SJ-P

SJ-P SERIES PLASTIC BLOWING FILM GRAVURE PRINTING UNIT

SJ-P系列塑料吹膜凹版印刷机组

OPTIONAL EQUIPMENT 选择性配备

Auto Loader	自动吸料机
Corona Treater	电晕处理
Rotary Die Head	旋转模头
Air Compressor	空气压缩机
Mechanics Screen Changer	快换网装置
Double Winder	双收卷
Air Shaft	气胀轴



MAIN TECHNICAL PARAMETERS 主要技术参数

Model	型号	SJ-P45	SJ-P50	SJ-P55	SJ-P60	SJ-P65
Suitable material	适用材料	HDPE LDPE LLDPE	HDPE LDPE LLDPE	HDPE LDPE LLDPE	HDPE LDPE LLDPE	HDPE LDPE LLDPE
Film width	产品宽度	100-500mm	300-600mm	400-800mm	500-1000mm	600-1200mm
Film thickness	产品厚度	0.009-0.10mm	0.009-0.10mm	0.009-0.15mm	0.009-0.15mm	0.009-0.15mm
		0.02-0.15mm	0.02-0.15mm	0.03-0.15mm	0.03-0.15mm	0.03-0.15mm
Max. extrusion output	最大产量	35kg/hr	40kg/hr	50kg/hr	55kg/hr	55kg/hr
		45kg/hr	50kg/hr	60kg/hr	70kg/hr	70kg/hr
Extruder	挤出机	挤出机	挤出机	挤出机	挤出机	挤出机
Screw diameter	螺杆直径	φ45	φ50	φ55	φ60	φ65
Screw L/d length	螺杆长径比	28:1/30:1	28:1/30:1	28:1/30:1	28:1/30:1	28:1/30:1
Screw material	螺杆材料	Sacm-645/38 Crmoala	Sacm-645/38 Crmoala	Sacm-645/38 Crmoala	Sacm-645/38 Crmoala	Sacm-645/38 Crmoala
Cylinder material	料筒材料	Sacm-645/38 Crmoala	Sacm-645/38 Crmoala	Sacm-645/38 Crmoala	Sacm-645/38 Crmoala	Sacm-645/38 Crmoala
Cylinder cooling	料筒冷却	370Wx1	370Wx2	370Wx2	370Wx2	370Wx2
Main motor	主机功率	11kw	15kw	18.5kw	22kw	22kw
Temperature control	料筒温度控制	3	3	3	4	4
Average power consume	平均耗电量	15kw	18kw	20kw	25kw	30kw
Type of die	模头	模头	模头	模头	模头	模头
Die Size	模口	φ60/80	φ60/100	φ80/100	φ100	φ120/150
		φ100/120	φ120/150	φ180/200	φ200	φ220/250
temperature control	温度控制	3	3	3	3	3
Air ring	风环	1	1	1	1	1
Air blower	风机	1.5kw	2.2kw	3kw	3kw	4kw
Center steady stick	中心稳定棒	1	1	1	1	1
Take-up unit	引取装置	引取装置	引取装置	引取装置	引取装置	引取装置
Roller width	牵引辊宽	600mm	700mm	900mm	1100mm	1300mm
Effective width	有效引取膜宽度	500mm	600mm	800mm	1000mm	1200mm
Height adjustable	升降调节距离	800mm	800mm	800mm	800mm	800mm
Take-up speed	引取速度	10-100m/min	10-100m/min	10-100m/min	10-80m/min	10-80m/min
Take-up motor	引取电机功率	0.75kw	1.1kw	1.1kw	1.5kw	1.5kw
Winding unit	卷取装置	卷取装置	卷取装置	卷取装置	卷取装置	卷取装置
Type	表面摩擦式	Surface friction type	Surface friction type	Surface friction type	Surface friction type	Surface friction type
Winding motor	卷取功率	10N.m	10N.m	10N.m	16N.m	16N.m
Winding speed	卷取速度	10-100m/min	10-100m/min	10-80m/min	10-80m/min	10-80m/min
Power supply	电源	380V, 50HZ, 3PHASE	380V, 50HZ, 3PHASE	380V, 50HZ, 3PHASE	380V, 50HZ, 3PHASE	380V, 50HZ, 3PHASE
Outline dimension(LxWxH)	外形尺寸 (LxWxH)	5.0x2.1x4.5m	5.0x2.1x4.5m	5.5x2.3x5.2m	5.8x2.8x6.3m	5.8x2.6x6.3m
printing length(mm)	印刷长度	250-1000	250-1000	250-1000	250-1000	250-1000
precision of color printing(mm)	套印精度	横向0.2纵向0.2	横向0.2纵向0.2	横向0.2纵向0.2	横向0.2纵向0.2	横向0.2纵向0.2

机器外观及技术参数如有更改，恕不另行通知。未经铸信公司明确书面许可，不得翻印或传播有关资料。
Zhuxin is continuously seeking for development of their products, for this reason, Zhuxin reserves the right to supply the improved products without prior notice.

PE

PE EXTRUDER AND PRINTING MACHINE

PE吹膜凸版印刷连体机



MAIN TECHNICAL PARAMETERS 主要技术参数

Model	型号	SJ-P50	SJ-P55	SJ-P60
Suitable materials	适用原料	HDPE/LDPE	HDPE/LDPE	HDPE/LDPE
Screw diameter(mm)	螺杆直径	φ50	φ55	φ60
Screw L/D Length	螺杆长径比	28:1/30:1	28:1/30:1	28:1/30:1
Blowing film driving motor(kw)	吹膜机主机功率	15	18.5	22
Max.extrusion output(kg/hr)	最大挤出量	45	60	75
Die size(mm)	模头直径	60/80	80/100	100/125
Width of the blowing film(mm)	吹膜宽度	600	800	1000
Thickness of blowing film(mm)	吹膜厚度	0.01-0.06	0.01-0.06	0.01-0.06
Max.printing with(mm)	印刷宽度	560	760	960
Printing length(mm)	印刷长度	250-1000	250-1000	250-1000
Precision of color printing(mm)	套印精度	横向0.2纵向0.2	横向0.2纵向0.2	横向0.2纵向0.2
Weight of overall(kg)(two color)	整机重量 (配2色)	45000	50000	55000
Cover dimensions(LxWxH)(mm)	占地尺寸 (长x宽x高)	8100x2200x4500	8500x2400x5000	9000x2800x5500

机器外观及技术参数如有更改，恕不另行通知。未经铸信公司明确书面许可，不得翻印或传播有关资料。
Zhuxin is continuously seeking for development of their products, for this reason, Zhuxin reserves the right to supply the improved products without prior notice.

SJ-A45

HIGH SPEED MINI FILM BLOWING MACHINE

SJ-A45迷你型高速吹膜机



MAIN TECHNICAL PARAMETERS 主要技术参数

Model	型号	SJ-A45
Film width	产品宽度	HD(100-500mm)
Film thickness	产品厚度	LD(0.02-0.15mm)
Inverter	变频器	(15KW) Delta Inverter
Gearbox	齿轮箱	146HANGZHOU Xiaoshan
Max extrusion output	最大产量	HD(50KG);LD(60KG)
Screw diameter	螺杆直径	φ45mm
Main motor	主机功率	15KW-4级西门子贝得 Siemens
Power supply	电源	380V,50HZ,3PHASE
Die size	模口	φ60mm.台湾式高速模头 Taiwan style high speed die head
Air ring	风环	双风口风环, 台湾式 Dual-lip air ring(Taiwan style)
Outline dimension	外形尺寸	3x1.5x3.6m

机器外观及技术参数如有更改, 恕不另行通知。未经铸信公司明确书面许可, 不得翻印或传播有关资料。
Zhuxin is continuously seeking for development of their products, for this reason, Zhuxin reserves the right to supply the improved products without prior notice.

SJ-A

MINI TYPE FILM BLOWING MACHINE

SJ-A迷你型吹膜机



OPTIONAL EQUIPMENT 选择性配备

Auto Loader	自动吸料机
Corona Treater	电晕处理
Rotary Die Head	旋转模头
Air compressor	空气压缩机

MAIN TECHNICAL PARAMETERS 主要技术参数

Model	型号	SJ-A45
Film width	产品宽度	100-500mm
Film thickness	产品厚度	0.009-0.05mm
Max extrusion output	最大产量	35kg/hr
Screw diameter	螺杆直径	40kg/hr
Screw /d length	螺杆直径比	28:1/30:1
Die size	模口	φ60
Roller width	牵引辊宽	φ100
Effective width	有效引取膜宽度	600mm
		500mm

机器外观及技术参数如有更改, 恕不另行通知。未经铸信公司明确书面许可, 不得翻印或传播有关资料。
Zhuxin is continuously seeking for development of their products, for this reason, Zhuxin reserves the right to supply the improved products without prior notice.

CY-800ZD

AUTOMATIC SOFT LOOP HANDLE
BAG-MAKING MACHINE WITH SERVO MOTOR

全自动软手袋制袋机 (带伺服电机)



OPTIONAL EQUIPMENT 选择性配备

Servo Motor	伺服电机
Feeding EPC	自动纠偏
PLC	PLC
Air Shaft	气胀轴



MAIN TECHNICAL PARAMETERS 主要技术参数

Model	型号	CY-800ZD
bag width	制袋宽度	250-650mm
bag length	制袋长度	250-650mm
top folding	折缝尺寸	30-75mm
film thickness	薄膜厚度	0.045-0.09mm
total power	总功率	11kw
main power	主机功率	2.2kw
servo motor power	伺服电机功率	2kw
feeding motor power	放料电机功率	400w
outline dimensions	外形尺寸 (LxWxH)	7600x3000x1850
weight	机重	3500kg

机器外观及技术参数如有更改, 恕不另行通知。未经铸信公司明确书面许可, 不得翻印或传播有关资料。
Zhuxin is continuously seeking for development of their products, for this reason, Zhuxin reserves the right to supply the improved products without prior notice.

CY-700

CY-700 AUTOMATIC T-SHIRT BAG
MAKING MACHINE(ONE LINE)

全自动背心袋成型制袋机



Bag making speed
制袋速度
80-150 pcs/min



OPTIONAL EQUIPMENT 选择性配备

Servo Motor	伺服电机
Photocell Eye	光电眼
Punching Device	自动冲料
Computer Control	电脑控制
PLC	PLC触摸屏
Conveyor Belt	输送带

MAIN TECHNICAL PARAMETERS 主要技术参数

Model	型号	CY-700
Max Width Of Bag-making	制袋宽度	180-650mm
Max Length Of Bag-making	制袋长度	200-650mm
Thickness Of Film	薄膜厚度	0.015-0.035mm
Speed Of Bag-making	制袋速度	80-150pc/min
Motor Power	电机功率	6kw
Air Pressure	气压	5kg/cm ²
Outline Dimension	外形尺寸	6500x1200x1800mm
Weight	机重	1400kg



CY-500X2

AUTOMATIC T-SHIRT BAG-MAKING
MACHINE(TWO LINES)

双道全自动背心袋成型制袋机



Bag making speed
制袋速度
210 pcs/minx2

MAIN TECHNICAL PARAMETERS 主要技术参数

Model	型号	CY-500x2
Max Width Of Bag-making	制袋宽度	450mmx2
Max Length Of Bag-making	制袋长度	600mm
Max Speed Of Bag Making	制袋速度	210pcs/minx2
Single-face Film Thickness	薄膜单面厚度	0.010-0.05mm
Outline Dimension(LxWxH)	外形尺寸	5500x1800x1600mm
Step Motor	步进电机	350Ax2
Unwinding Motor	放料电机功率	400wx2
Weight	机重	2700kg

机器外观及技术参数如有更改, 恕不另行通知。未经铸信公司明确书面许可, 不得翻印或传播有关资料。
Zhuxin is continuously seeking for development of their products, for this reason, Zhuxin reserves the right to supply the improved products without prior notice.

CY-430X2

HIGH-SPEED AUTOMATIC T-SHIRT
BAG-MAKING MACHINE(TWO LINES)

双道高速全自动背心袋成型制袋机



OPTIONAL EQUIPMENT 选择性配备

Servo Motor	伺服电机
Photoeye	光电眼
Punching Device	自动冲料
Computer Control	电脑控制
PLC	PLC触摸屏
Conveyor Belt	输送带



Bag making speed
制袋速度
350 pcs/minx2



MAIN TECHNICAL PARAMETERS 主要技术参数

Model	型号	CY-430x2
Max Width Of Bag-making	最大制袋宽度	400mmx2
Max Length Of Bag-making	最大制袋长度	650mm
Max Speed Of Bag Making	制袋速度	350pcs/minx2
Single-face Film Thickness	薄膜单面厚度	0.010-0.025mm
Air Compressor(Not Include)	气压	6HP
Outline Dimension(LxWxH)	外形尺寸	5400X1850X1500mm
Weight	机重	2700kg
Servo Motor	伺服电机功率	4.4kwx2
Unwinding Motor	放料电机功率	750wx2
Conveyor Motor	输送电机功率	370wx1
Tray Motor	托盘电机功率	40wx2
Trim Motor	整机电机功率	60w
Waste Material Motor	废材输送电机功率	60wx2

机器外观及技术参数如有更改，恕不另行通知。未经铸信公司明确书面许可，不得翻印或传播有关资料。
Zhuxin is continuously seeking for development of their products, for this reason, Zhuxin reserves the right to supply the improved products without prior notice.

GDR-600/700

GDR-600/700 SERIES MIDDLE SPEED HEAT
SEALING & HEAT-CUTTING BAG-MAKING MACHINE

GDR-600/700 中速热封热切制袋机



Bag making speed
制袋速度
120-200 pcs/min



DFR-450X2

MIDDLE SPEED DOUBLE-CHANNELS HEAT-SEALING
& HEAT-CUTTING BAG-MAKING MACHINE

DFR-450x2 中速双通热封热切制袋机



Bag making speed
制袋速度
120-200 pcs/min



MAIN TECHNICAL PARAMETERS 主要技术参数

Model	型号	DFR-450x2
Bag-making Width	制袋宽度	30-400mm
Bag-making Length	制袋长度	10-999mm
Bag-making Thickness	制袋厚度	0.01-0.05mm
Bag-making Speed	制袋速度	120-200pcs/min
Main Motor	主机功率	1.5kw
Heating Power	加热功率	2.4kw
Total Power	总功率	4.6kw
Weight	机重	900kg
Dimensions(LxWxH)	外形尺寸	2500x1300x1500mm

机器外观及技术参数如有更改，恕不另行通知。未经铸信公司明确书面许可，不得翻印或传播有关资料。
Zhuxin is continuously seeking for development of their products, for this reason, Zhuxin reserves the right to supply the improved products without prior notice.

RLD SERIES

RLD SERIES RIBBON-THROUGH
CONTINUOUS-ROLLED BAG MAKING MACHINE

RLD穿带连卷制袋机



Bag making speed
制袋速度

15-35 pcs/min

MAIN TECHNICAL PARAMETERS 主要技术参数

Model	型号	RLD-1000
Max Width Of Bag-making	最大制袋宽度	980mm
Max Length Of Bag-making	最大制袋长度	999mm
Thickness Of Film	薄膜厚度	0.01-0.05mm
Speed Of Bag-making	制袋速度	15-35pcs/min
Total Power	总功率	11kw
Outline Dimension	外形尺寸	9200x3100x2200mm
Weight	机重	3200kg
Main Power	主机功率	2.2kw
Weight	机重	1000kg
Step Motor Power	步进电机功率	3kw
Feeding Motor Lacing Threads Motor Power	送料电机功率	1.1kw
Lacing Threads Motor Power	穿绳电机功率	300w
Edge Folding Motor Power	折边电机功率	500w
Rewinding Motor Power Heating Power	收卷电机功率	1.1kw
Tailing Motor Power	收卷拖料电机功率	500w
Heating Power	加热功率	3kw

机器外观及技术参数如有更改，恕不另行通知。未经铸信公司明确书面许可，不得翻印或传播有关资料。
Zhuxin is continuously seeking for development of their products, for this reason, Zhuxin reserves the right to supply the improved products without prior notice.



GFQ-600/1200

GFQ-600-1200 COMPUTER HEAT-SEALING
& CLOD-CUTTING BAG-MAKING MACHINE


GFQ-600/1200电脑热封冷切制袋机

无张力型
TENSION FREETYPE



Bag making speed
制袋速度

30-120 pcs/min

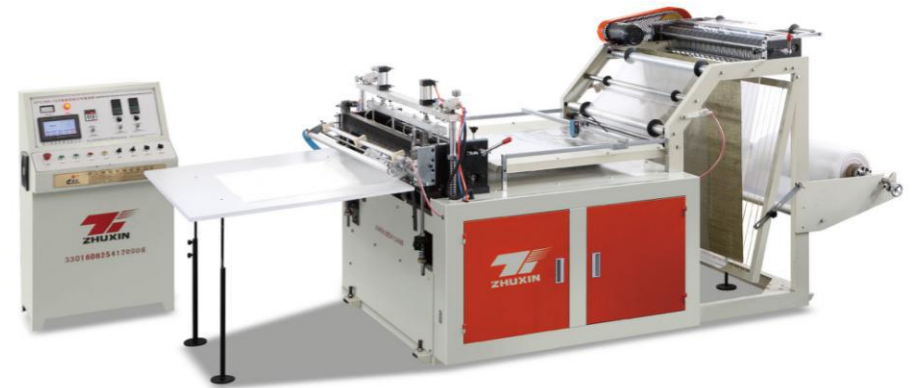

MAIN TECHNICAL PARAMETERS 主要技术参数

Model	型号	GFQ-600	GFQ-800	GFQ-1000	GFQ-1200
Max. width of bag making	制袋最大宽度	550mm	750mm	950mm	1150mm
Max. length of bag making	制袋最大长度	950mm	950mm	1200mm	2000mm
Speed of bag making	制袋速度	30-120pcs/min	30-100pcs/min	30-100pcs/min	30-80pcs/min
Power of motor	主电机功率	1.5kw	1.5kw	1.5kw	1.5kw
Unwinding of motor	放料电机	400w	400w	400w	400w
Machine size	外形尺寸	3200x1150x1550mm	3200x1350x1650mm	3200x1550x1750mm	3400x1750x1850mm
Weight	机重	750kg	900kg	1100kg	1300kg
Heating power	加热功率	2kw	3kw	4kw	4kw

机器外观及技术参数如有更改，恕不另行通知。未经铸信公司明确书面许可，不得翻印或传播有关资料。
Zhuxin is continuously seeking for development of their products, for this reason, Zhuxin reserves the right to supply the improved products without prior notice.

SHXJ-370X4

DOUBLE LAYER FOUR CHANNELS HOT
SEALING AND COLD CUTTING BAG MACHINE

双层四通道电脑热封冷切制袋机



MAIN TECHNICAL PARAMETERS 主要技术参数

Model	型号	SHXJ-370X4
Bag width	制袋宽度	350mm
Bag length	制袋长度	100-600mm
Material	材料	LDPE HDPE
Thickness	厚度	0.01-0.025mm
Max speed of bag making	制袋速度	彩袋150x1pcs/min 白袋150x4pcs/min
Heating power	加热功率	6kw
Total power	总功率	8kw
Servo motor	伺服电机	1.5kw YASKAWA JAPAN
Cutter motor	主电机	1.5kw TAIWAN
Unwinding motor	放料主机	750w x4
Weight	机重	2000kg
Outline dimension	外形尺寸	4500x1350x1800mm

机器外观及技术参数如有更改，恕不另行通知。未经铸信公司明确书面许可，不得翻印或传播有关资料。
Zhuxin is continuously seeking for development of their products, for this reason, Zhuxin reserves the right to supply the improved products without prior notice.



Bag making speed
制袋速度
150x1 pcs/min(彩袋)



Bag making speed
制袋速度
150x4 pcs/min(白袋)

SHXJ-600/1200

HEAT SEALING AND COLD CUTTING
MACHINE WITH COMPUTER(NONPRINTING BAGS)

电脑热封冷切制袋机



Bag making speed
制袋速度
30-120 pcs/min



MAIN TECHNICAL PARAMETERS 主要技术参数

Model	型号	SHXJ-600	SHXJ-800	SHXJ-1000	SHXJ-1200
Width of sealing	封切宽度	550mm	750mm	950mm	1150mm
Length of sealing	封切长度	950mm	950mm	950mm	950mm
Speed of bag-making	制袋速度	30-120pcs/min	30-100pcs/min	30-100pcs/min	30-80pcs/min
Unwinding of motor	放料电机	400w	400w	400w	400w
Line	条数	4	4	4	4
Power	电机功率	1.5kw	1.5kw	1.5kw	1.5kw
Machine size	外形尺寸	3200x1150x1700mm	3200x1350x1800mm	3600x1550x1900mm	3600x1750x2000mm
Weight	机重	800kg	1000kg	1200kg	1400kg
Heating power	加热功率	4kw	5kw	6kw	6kw

机器外观及技术参数如有更改，恕不另行通知。未经铸信公司明确书面许可，不得翻印或传播有关资料。
Zhuxin is continuously seeking for development of their products, for this reason, Zhuxin reserves the right to supply the improved products without prior notice.

DFL SERIES

DFL SERIES COMPUTER CUTTING-OFF
CONTINUOUS-ROLLED BAG MAKING MACHINE

DFL系列电脑点断连卷制袋机



MAIN TECHNICAL PARAMETERS 主要技术参数

Model	型号	DFL-500	DFL-600	DFL-700	DFL-800
Max Width Of Bag making	制袋最大宽度	480mm	580mm	680mm	780mm
Film Thickness	薄膜厚度	0.008-0.025mm	0.008-0.025mm	0.008-0.025mm	0.008-0.025mm
Max cutting length	最大裁切长度	999mm	999mm	999mm	999mm
production capacity	生产能力	30-120pcs/min	30-120pcs/min	30-120pcs/min	30-120pcs/min
total power	总功率	3.2kw	3.4kw	3.6kw	4.2kw
Outline Dimension(LxWxH)	外形尺寸 (LxWxH)	3350x900x1500mm	3350x1000x1500mm	3350x1100x1500mm	3350x1250x1500mm
Weight	机重	650kg	750kg	800kg	900kg

机器外观及技术参数如有更改，恕不另行通知。未经铸信公司明确书面许可，不得翻印或传播有关资料。
Zhuxin is continuously seeking for development of their products, for this reason, Zhuxin reserves the right to supply the improved products without prior notice.

CY-600

CY-600 FULL AUTOMATIC
DISPOSABLE GLOVE MACHINE

全自动一次性手套机



MAIN TECHNICAL PARAMETERS 主要技术参数

Model	型号	CY-600
Producing Length	制手套长度	200-400mm
Producing Width	制手套宽度	270-330mm
Film Thickness	薄膜厚度	0.008-0.02mm
Producing Speed	制手套速度	40-130pcs/min
Main Power	主机功率	1.1kw
Power Source	电源	220V, 50HZ
Outline Dimension	外形尺寸 (LxWxH)	2300x1190x1500mm
Weight	机重	600kg

OPTIONAL EQUIPMENT 选择性配备

Servo Motor	伺服电机
Feeding EPC	放料纠偏
PLC	PLC
Air Shaft	气胀轴

机器外观及技术参数如有更改，恕不另行通知。未经铸信公司明确书面许可，不得翻印或传播有关资料。
Zhuxin is continuously seeking for development of their products, for this reason, Zhuxin reserves the right to supply the improved products without prior notice.

SHXJ-A

COMPUTER CONTROL TWO-LAYER ROLLING
BAG-MAKING MACHINE FOR VEST&FLAT BAGS

电脑控制双层连卷背心、平口袋制袋机



Bag making speed
制袋速度
40-120 pcs/min



MAIN TECHNICAL PARAMETERS 主要技术参数

Model	型号	SHXJ-A-500	SHXJ-A-600	SHXJ-A-700	SHXJ-A-800
Max Width Of Bag Making	最大制袋宽度	450mm	550mm	650mm	750mm
Max Length Of Bag Making	最大制袋长度	1200mm	1200mm	1200mm	1200mm
Thickness Of Film	制袋厚度	0.008-0.10mm	0.008-0.10mm	0.008-0.10mm	0.008-0.10mm
Speed Of Bag-making	制袋速度	40-120pcs/min	40-120pcs/min	40-120pcs/min	40-120pcs/min
Motor Power	电机功率	1.1kw	1.1kw	1.5kw	1.5kw
Electric Heating Power	电热功率	1.6kw	2kw	2.2kw	3kw
Weight	机重	850kg	900kg	1000kg	1800kg

机器外观及技术参数如有更改，恕不另行通知。未经铸信公司明确书面许可，不得翻印或传播有关资料。
Zhuxin is continuously seeking for development of their products, for this reason, Zhuxin reserves the right to supply the improved products without prior notice.

CY-SH-1000

DOUBLE-LAYER FOUR-LINES
AUTOMATIC T-SHIRT BAG-MAKING MACHINE

双层四道全自动背心袋制袋机



OPTIONAL EQUIPMENT 选择性配备

Servo Motor	伺服电机
PLC	PLC



MAIN TECHNICAL PARAMETERS 主要技术参数

Model	型号	CY-SH-1000
Bag Width(Non Printed)	袋宽 (单色)	100-350mmx4
Main Power	主电机	1.5kw
Bag Width(Erinted)	袋宽 (彩色)	100-950mm
Heating Power	加热功率	4kw
Bag Length	袋长放料	100x1200mm
Unwinding Motor	电机	400wx4
Speed	生产速度	40-120/minx4
Fim Thickness	薄膜厚度	0.01-0.05mm
Total Power	总功率	9kw
Gross Weight	整机重量	2500kg
Machines Size	外形尺寸 (LxWxH)	6500x1550x2000mm

机器外观及技术参数如有更改，恕不另行通知。未经铸信公司明确书面许可，不得翻印或传播有关资料。
Zhuxin is continuously seeking for development of their products, for this reason, Zhuxin reserves the right to supply the improved products without prior notice.

DFL 450

DRUM-TYPE CUTTING OFF CONTINUOUS
ROLLED BAG MAKING MACHINE

滚筒式点断连卷制袋机



Bag making speed
制袋速度
200 pcs/min



MAIN TECHNICAL PARAMETERS 主要技术参数

Model	型号	DFL-450
Bag Width	制袋宽度	450mm
Bag Length	制袋长度	250-650mm
Material	材料	LDPE HDPE
Thickness	厚度	0.010-0.020mm
Max Speed Of Bag Making	制袋速度	200pcs/min
Main Motor	主电机	3.7kw 国产
Mean Inverter	主机变频器	3.7kw made in china
Total Power	总功率	6kw
Weight	重量	800kg

机器外观及技术参数如有更改，恕不另行通知。未经铸信公司明确书面许可，不得翻印或传播有关资料。
Zhuxin is continuously seeking for development of their products, for this reason, Zhuxin reserves the right to supply the improved products without prior notice.



ZB SERIES

EDGE FOLDING AND ROLLING MACHINE

ZB型系列折边收卷机



Roll speed
收卷速度
60 m/min

MAIN TECHNICAL PARAMETERS 主要技术参数

Model	型号	ZB-1200	ZB-1400	ZB-1600
Max width of base Material	最大基材宽度	1200mm	1400mm	1600mm
Max Roll Speed	最高收卷速度	60m/min	60m/min	60m/min
Motor power	总功率	1.1kw	1.1kw	1.5kw
Outline dimension(LxWxH)	外形尺寸	2400x1500x1500mm	2600x1500x1500mm	2800x1500x1500mm
Weight	机重	800kg	900kg	1000kg

机器外观及技术参数如有更改，恕不另行通知。未经铸信公司明确书面许可，不得翻印或传播有关资料。
Zhuxin is continuously seeking for development of their products, for this reason, Zhuxin reserves the right to supply the improved products without prior notice.

RQL-600-1000

COMPUTER HEAT-CUTTING BAG-MAKING MACHINE

电脑热切制袋机



MAIN TECHNICAL PARAMETERS 主要技术参数

Model	型号	RQL-600	RQL-800	RQL-1000
Length of sealing&cutting	封切长度	999mm	999mm	999mm
Width of sealing&cutting	封切宽度	580mm	780mm	980mm
Speed of bagmaking	制袋速度	40-198pcs/min	40-198pcs/min	40-120pcs/min
Main power	主机功率	1.1kw	1.5kw	1.5kw
Conveyor motor power	输送电机功率	400w	400w	800w
Step motor power	步进电机功率	1.1kw	1.5kw	1.5kw
Heating power	加热功率	2kw	3kw	4kw
Weight	机重	800kg	1000kg	1200kg
Outline dimension(LxWxH)	外形尺寸	3600x1150x1700mm	3600x1350x1700mm	3600x1550x1700mm

机器外观及技术参数如有更改，恕不另行通知。未经铸信公司明确书面许可，不得翻印或传播有关资料。
Zhuxin is continuously seeking for development of their products, for this reason, Zhuxin reserves the right to supply the improved products without prior notice.

CY-HB

SOFT LOOP HANDLE BAG-MAKING MACHINE

CY-HB软式手提环制袋机



Bag making speed
制袋速度
20pcs/min

MAIN TECHNICAL PARAMETERS 主要技术参数

Model	型号	CY-HB
Max width of bag-making	制袋最大宽度	250-600mm
Max length of bag-making	制袋最大长度	700mm
Thickness of material	封切厚度	0.05-0.2mm
Speed of bag making	制袋速度	20pcs/min
Power	电源	AC220V
Total Power	电机功率	1.1kw
Outline dimension(LxWxH)	外形尺寸 (LxWxH)	1200x 1200x1200mm
Weight	整机重量	1100kg

机器外观及技术参数如有更改，恕不另行通知。未经铸信公司明确书面许可，不得翻印或传播有关资料。

Zhuxin is continuously seeking for development of their products, for this reason, Zhuxin reserves the right to supply the improved products without prior notice.

ZXRY-41000A

HIGH SPEED 4 COLOR 1000MM FLEXIBLE PRINTING MACHINE

卫星式高速4色柔版印刷机



Printing speed
印刷速度
150m/min



Printing color
可印色数
4colors



MAIN TECHNICAL PARAMETERS 主要技术参数

Model	型号	ZXRY-41000A
Machine colors	色数	4 / 6colors
Max.raw material width	最大材料宽度	1000mm
Max.Printing Width	最大印刷宽度	960mm
Printing materials	合适的印刷材料	20-350克的纸和膜 (Paper 20-350gsm)
Printing Speed(m/min)	最大印刷速度	150m/min
Register precision	套准精度	0.1mm
Unwind diameter	放卷直径	Φ1200mm
Rewind diameter	收卷直径	Φ1200mm
Master motor power	主马达	7.5kw
Machine power	机器功率	44kw
Power supply	电源	3P380V/50HZ
Weight of machine	整机重量	5000KG
Machine size	外形尺寸	7.0x2.6x4.0m

机器外观及技术参数如有更改，恕不另行通知。未经铸信公司明确书面许可，不得翻印或传播有关资料。

Zhuxin is continuously seeking for development of their products, for this reason, Zhuxin reserves the right to supply the improved products without prior notice.

YT SERIES

YT SERIES FLEXO PRINTING MACHINE

YT系列柔性凸版印刷机



Printing speed
印刷速度
5-50 m/min



Printing color
可印色数
4 colors



Printing color
可印色数
6 colors



YT

YT FLEXO PLATE MAKING MACHINE
YT凸版印刷制版机



Printing color
可印色数
2 colors



MAIN TECHNICAL PARAMETERS 主要技术参数

Model	型号	YT-2600	YT-2800	YT-21000	YT-4600	YT-4800	YT-41000	YT-6600	YT-6800	YT-61000
Max width of substrate	最大材料宽度	600mm	800mm	1000mm	600mm	800mm	1000mm	600mm	800mm	1000mm
Max printing width	最大印刷宽度	560mm	760mm	960mm	560mm	760mm	960mm	560mm	760mm	960mm
Range of printing length	印刷品长度范围	200-1100mm	200-1100mm	200-1100mm	200-1100mm	200-1100mm	200-1100mm	200-1100mm	200-1100mm	200-1100mm
Max Diameter of web	卷材最大直径	φ450mm	φ450mm	φ450mm	φ450mm	φ450mm	φ450mm	φ450mm	φ450mm	φ450mm
Printing speed	印刷速度	5-50m/min	5-50m/min	5-50m/min	5-50m/min	5-50m/min	5-50m/min	5-50m/min	5-50m/min	5-50m/min
Heating power	加热功率	5kw	5kw	10kw	10kw	15kw	20kw	12kw	18kw	24kw
Total power	总功率	10kw	10kw	13kw	15kw	15kw	25kw	17kw	23kw	29kw
Outline dimension(LxWxH)	外形尺寸	1900×1800×2300mm	1900×2000×2300mm	1900×2200×2400mm	4200×1800×2400mm	4200×1800×2400mm	4200×2000×2400mm	4200×1860×2550mm	4200×1860×2550mm	4200×2000×2550mm
Weight	机重	2000kg	2500kg	3000kg	3000kg	3500kg	4000kg	3500kg	4000kg	4500kg
Plate thickness	版材厚度	2.38mm	2.38mm	2.38mm	2.38mm	2.38mm	2.38mm	2.38mm	2.38mm	2.38mm

(Both side adhesive tape included) (包括双面胶膜)

机器外观及技术参数如有更改，恕不另行通知。未经铸信公司明确书面许可，不得翻印或传播有关资料。

Zhuxin is continuously seeking for development of their products, for this reason, Zhuxin reserves the right to supply the improved products without prior notice.

YT-6100S

SIX-COLOR FLEXOGRAPHIC HIGH SPEED PRINTING MACHINE

六色柔版高速印刷机



Printing speed
印刷速度
120 m/min



Printing color
可印色数
4 colors



Printing color
可印色数
6 colors



MAIN TECHNICAL PARAMETERS 主要技术参数

Model	型号	YT-600	YT-800	YT-1000
Max.width Of Substrate	最大材料宽度	600mm	800mm	1000mm
Max.printing Width	最大印刷宽度	560mm	760mm	960mm
Printing Materials	合适的印刷材料	20-350克的纸和膜 20-350g paper and film		
Printing Speed	最大印刷速度	120m/min	120m/min	120m/min
Plate Thickness	板材厚度	1.7-3.4	1.7-3.4	1.7-3.4
Weight Of Machine	整机重量	5000	5500	6000
Machine Size	外形尺寸	5.4×1.8×2.9m	5.4×2×2.9m	5.4×2×2.9m

机器外观及技术参数如有更改，恕不另行通知。未经铸信公司明确书面许可，不得翻印或传播有关资料。

Zhuxin is continuously seeking for development of their products, for this reason, Zhuxin reserves the right to supply the improved products without prior notice.

DASY 800.1100E

COMPUTERIZED REGISTER
ROTOGRAVURE PRINTING MACHINE

凹版电脑套色彩印机



Printing speed
印刷速度
120 m/min



MAIN TECHNICAL PARAMETERS 主要技术参数

Model	型号	DASY800E	DASY1100E
Web width	印刷宽度	800mm	1100mm
Printing Speed	印刷速度	120m/min	120m/min
Print cyl. Dia.	印版直径	Φ100-350mm	Φ100-350mm
Rolling material dia.	卷料直径	Φ570mm	Φ570mm
Print cyl. Cross adjustable	印版横向调节量	30mm	30mm
Print cyl. Longitudinal adjustable	印刷纵向调节量	100°	100°
Registering accuracy	套印精度	±0.1mm	±0.1mm
Total power	装机总功率	96kw	109kw
Weight	机器重量	10000kg	11000kg
Overall Dimension(LxWxH)	机器尺寸	11000x3100x3200mm	11000x3400x3200mm

YWAY850.1050A

HIGH SPEED COMPUTERIZED
REGISTER ROTOGRAVURE PRINTING MACHINE

电脑套色凹版彩印机



Printing speed
印刷速度
150 m/min



MAIN TECHNICAL PARAMETERS 主要技术参数

Printing colors	印刷色数	8 colors
Max printing width	印刷宽度	1050mm
Max material width	料卷最大宽度	1050mm
Printing material	印刷基材	玻璃纸20-30um, PET12-60um OPP 18-60um,BOPP 15-60um CPP 20-60um,PE 40-140um
Max mechanical speed	最大机械速度	170m/min
Max printing speed	最大印刷速度	150m/min
Register accuracy	套印精度	±0.1mm
Max unwinding and rewinding diameter	收放卷直径	600mm
Paper core diameter	纸芯直径	Φ76mm
Printing core diameter	版辊直径	Φ120-Φ300mm
Printing cylinder diameter	加热方式	电加热与空气能加热 (选配) Electrical heating and gas heating (optional)
Heating type	机器总功率	约66.3kw(不包含加热部分)
Total power	机器尺寸	16000x3850x3145mm
Dimension weight	机器重量	约22000kg

机器外观及技术参数如有更改, 恕不另行通知。未经铸信公司明确书面许可, 不得翻印或传播有关资料。

Zhuxin is continuously seeking for development of their products, for this reason, Zhuxin reserves the right to supply the improved products without prior notice.

WFQ SERIES

WFQ SERIES HORIZONTAL TYPE
HIGH SPEED AUTOMATIC SLITTING
MACHINE(SEPARATING AND
CUTTING MACHINE)

WFQ型系列卧式高速自动分切机



Separating and cutting speed
分切速度
5-160 m/min



MAIN TECHNICAL PARAMETERS 主要技术参数

Model	型号	WFQ-1000	WFQ-1300
Max Width Of Separating And Cutting Roll Material	分切卷材最大宽度	1000mm	1300mm
Max Diameter Of Separating And Cutting Roll Material For Unwinding	分切卷材放料最大直径	φ700mm	φ700mm
Max Diameter Of Separating And Cutting Roll Material For Rewinding	分切卷材收料最大直径	φ550mm	φ550mm
Width Of Roll Material Cutting	分切卷材宽度	30-1000mm	300-1300mm
Separating And Cutting Speed	分切速度	5-160m/min	5-160m/min
Deviation-rectifying Error	纠偏误差	≤0.5mm	≤0.5mm
Total Power	总功率	3kw	3kw
Outline Dimension(LxWxH)	外形尺寸	2200×2200×1100mm	2200×2400×1100mm
Weight	机重	1500kg	1800kg

机器外观及技术参数如有更改, 恕不另行通知。未经铸信公司明确书面许可, 不得翻印或传播有关资料。

Zhuxin is continuously seeking for development of their products, for this reason, Zhuxin reserves the right to supply the improved products without prior notice.

LFQ SERIES

LFQ SERIES VERTICAL AUTOMATIC SLITTING MACHINE
(SEPARATING AND CUTTING MACHINE)

LFQ型系列立式自动分条机



Separating and cutting speed
分切速度
5-160 m/min



MAIN TECHNICAL PARAMETERS 主要技术参数

Model	型号	LFQ-700	LFQ-1000	LFQ-1300
Max Width	最大宽度	700mm	1000mm	1300mm
Max Diameter Of Unwinding	放料最大直径	φ600mm	φ600mm	φ600mm
Max Diameter Of Rewinding	收料最大直径	φ450mm	φ450mm	φ450mm
Width Of Roll Material Cutting	分切卷材宽度	30-650mm	30-1000mm	300-1300mm
Separating And Cutting Speed	分切速度	5-160m/min	5-160m/min	5-160m/min
Deviation-rectifying Error	纠偏误差	≤0.5mm	≤0.5mm	≤0.5mm
Total Power	总功率	2.2kw	3kw	3kw
Outline Dimension(LxWxH)	外形尺寸	1100×1900×1400mm	1100×2200×1400mm	1100×2600×1400mm
Weight	机重	1200kg	1500kg	1800kg

机器外观及技术参数如有更改, 恕不另行通知。未经铸信公司明确书面许可, 不得翻印或传播有关资料。

Zhuxin is continuously seeking for development of their products, for this reason, Zhuxin reserves the right to supply the improved products without prior notice.

SJ-B150/300

PLASTIC GRINDING MILLING GRANULATOR

塑料混炼造粒机



MAIN TECHNICAL PARAMETERS 主要技术参数

Model	型号	SJ-B150	SJ-B300
Capacity of Barrel	机器筒体容量	150L	300L
Output Capacity	生产能力	60-80kg/h	200-300kg/h
Main Motor Power	主电机功率	18.5kw	37.5kw
Rotary Speed of Main Shaft	主轴转速	660r/min	660r/min
Overall Dimensions	机器外形尺寸	1800x750x1400mm	2000x900x1600mm
Number of knives	刀数	2 turn 6 fixed knife	3 turn 4 fixed knife
Weight	机器重量	900kg	1200kg

机器外观及技术参数如有更改，恕不另行通知。未经铸信公司明确书面许可，不得翻印或传播有关资料。
Zhuxin is continuously seeking for development of their products, for this reason, Zhuxin reserves the right to supply the improved products without prior notice.

PLASTIC GRIND MACHINE

塑料粉碎机



MAIN TECHNICAL PARAMETERS 主要技术参数

Model	型号	F250	F500
Output	产量	100kg/hr	300kg/hr
Motor	电机	7.5kw	11kw
Size Of Material Inlet	进料口尺寸	300x300mm	300x300mm
Cutter Quantity	刀数	5pcs	8pcs
Outline Dimension(LxWxH)	外形尺寸	700x1200x1500mm	950x1450x1600mm
Weight	机重	350kg	700kg


机器外观及技术参数如有更改，恕不另行通知。未经铸信公司明确书面许可，不得翻印或传播有关资料。
Zhuxin is continuously seeking for development of their products, for this reason, Zhuxin reserves the right to supply the improved products without prior notice.



X626-12T ROCKER HYDRAULIC PRESSURE PUNCHING MACHINE
摇臂式液压裁断机



X626-10T ROCKER HYDRAULIC PUNCHING MACHINE
摇臂式液压裁断机

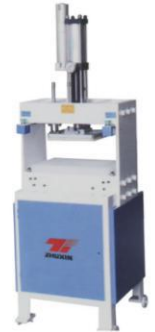

QD-209 PNEUMATIC PUNCHING MACHINE
气动冲口机



QD-208 PNEUMATIC PUNCHING MACHINE
气动冲口机



180 MODEL AUTOMATIC LOADER AND CRUSHER
薄膜自动引取粉碎机



WATER CHILLER
冷水机



XL627-SZ40T-60T AUTO BALANCE HYDRAULIC FULL HEAD PUNCHING MACHINE
精密四柱自动平衡油压裁断机



MIXER
搅拌机

 FITTINGS 配件


AIR RING
风环



DIE HEAD
模头



HIGH STRENGTH HARD TOOTHED SURFACE
REDUCTION GEARBOX
高强度硬齿面减速箱



SCREW AND BARREL
螺杆和料筒



HIGH-SPEED SCREEN CHANGER
快速换网器



AUTO LOADER
自动吸料机



ELECTRICAL CORONA TREATER
电子式电晕处理机



PLC
触摸屏



COMPUTER + DRIVER (HEAT-SEALING &
HEAT-CUTTING BAG-MAKING MACHINE)
热封热切电脑+驱动器



COMPUTER + DRIVER HEAT-SEALING &
COLD-CUTTING BAG-MAKING MACHINE
热封冷切电脑+驱动器

 FITTINGS 配件


PUNCH
打孔机



STEP MOTOR
步进电机



EPC
纠偏



PUNCH
手提打孔机



SERVO MOTOR
伺服电机



INVERTER
变频器



AIR COMPRESSOR
空气压缩机



CONVEYOR
输送台



AIR BLOWER
风机



AIR SHAFT
气涨轴



RUBBER ROLLER
胶辊



ANILOX ROLLER
网纹辊