

www.zhuxin.cn

Excellent Food Packaging Industry Solutions

优秀的食品包装行业解决方案



浙江铸信机械有限公司 ZHEJIANG ZHUXIN MACHINERY CO.,LTD

浙江省温州市平阳县宋桥镇章桥村粮油东路118号
Liangyou East Road 118, Zhangqiao, Wankan Town,
Pingyang County, Wenzhou City, China
☎ 0577-63081111 63778111 63776555
📠 +86- (0) 13655772222
✉ 0577-63778011
📧 admin@zhuxin.cn admin@chinazhuxin.com



www.zhuxin.cn

Zhejiang Zhuxin Machinery Co.,Ltd



270

Million Metric Tons Global Plastic Production
全球塑料生产量 (百万吨)

275

Million Metric Tons Total Plastic Waste
塑料垃圾总量 (百万吨)

99.5

Million Metric Tons Coastal Plastic Waste
沿海塑料垃圾 (百万吨)

31.9

Million Metric Tons Coastal mismanaged Plastic Waste
未妥善处理的沿海塑料垃圾 (百万吨)

8

Million Metric Tons of Plastic Waste Goes Into The Ocean
塑料垃圾进入海洋 (百万吨)

6,350-245,000

Million Metric Tons of Plastic Waste Goes Into The Ocean
据估计海洋表面漂浮的塑料垃圾总量 (百万吨)

After reasonable planning and development in various countries, the use of paper has become more rational, environmentally friendly and sustainable. The development of the paper packaging industry, which is degradable and non-polluting, has become more promising.

经过各个国家的合理规划和开发, 纸张的使用也变的更加合理、环保并可持续, 选择可降解, 无污染的纸张包装行业, 发展也变的更令人期待

Generated by 2 billion people
within 50km (30 miles) of the coast

由距离海岸线50千米范围内的20亿居民产生,
其中生活所使用的包装等塑料占据很大部分。

Each of your choices
**Have a major
impact on the world**

您的每一个选择
都对世界有重大影响

According to past data collection, 192 million tons of solid waste were generated in 192 countries along the world's major ocean coasts, of which 275 million tons were plastic waste. According to statistics, eight million untreated plastic waste was discharged into the ocean.

Let us change it all!

根据以往数据收集, 全球各大海洋沿岸的192个国家共产生了25亿吨固体垃圾, 其中2.75亿吨是塑料垃圾。据统计, 有八百万吨未经处理的塑料垃圾被排入海洋。

让我们改变这一切!

The future market Belongs To The Paper Bag Industry

未来市场属于纸袋行业

Zhejiang Zhuxin Machinery Co., Ltd Established in 1989, Zhuxin Machinery Co., Ltd has been the symbol of high quality and excellent service in machinery areas for many years. Our factory is located in Pingyang County, and close to the 104 National Highway. It is about 40 km away from Wenzhou Airport. We researched and developed our machines on basis of advanced technology introduced from developed countries. As a professional and experienced manufacturer in China, we are able to produce many kinds of machines like Film Blowing Machine, Blown Film Machine, Plastic Extruder Machine, Film Extrusion Machine Bag Making Machine, Paper Bag Making Machine, Packing Machine, Printing Machine and Leather & Shoe Cutting Machines etc. Accredited by ISO9001, CE certificates, you are ensured the quality of every Zhuxin machine. Inheriting the spirit of "to achieve perfection, build integrity", we provide lifelong maintenance for all the machines we sell. Our machines have a ready market both at home and abroad, and we still try our best to provide better quality and service to all regular and new customers.

We would like to cooperate with our friends and develop together. All friends at home and abroad are warmly welcome!

浙江铸信机械有限公司是一家专业的纸袋机生产商（可调式卷筒底纸袋机、CY-400全自动高速食品袋纸袋机、CY-450中封纸袋机、CY-180全自动方底纸袋机），我们有近二十年的机械设计和制造经验，先进的技术，本着“铸造精品、经营诚信”的服务理念，根据客户的不同生产条件、不同生产能力提供纸袋机等机械。选择包装机械，浙江铸信机械是您不错的选择，我们为所有售出产品均提供终身维护，为客户无偿提供科学、经济、便捷的工程预算方案，想客户所想，为客户创造利润。

铸信机械强力依托服务至上的经营战略和科学高效的管理运作，始终致力于“弘扬创业精神、打造民族品牌”。目前产品畅销全国及亚、非、欧等30多个国家和地区。



CY-290/460

Autoamtic Roll To Square Bottom Paper Bag Making machine

全自动卷筒方底纸袋机

Introduction 概述

CY-290/460 type adjustable roll to square bottom paper bag making machine, has the advantages of high speed, high production efficiency and wide adjustment range. It is designed to manufacture square bottom paper bags from paper roll in blank or printed, and can complete side gluing, tube forming, cutting, bottom impressing, bottom gluing, bottom forming and final product output within one time. Controlled by PLC system, equipped with touch screen and servo motor for bag length control, this machine can produce a variety of specifications paper bags. It is an ideal equipment for making paper bag for foodstuff bag or shopping bag.

CY-290/460型可调式卷筒方底纸袋机，它具有速度快、生产效益高、调节范围大的优点。此设备是将原色或印刷好的卷筒纸由本机一次完成侧边上胶、折叠成微、纸筒切断、底部涂胶、袋底成型、出袋，整机由计算机中央控制系统控制、触摸屏显示，伺服电机控制纸袋长短，可生产多种规格纸袋，是纸袋生产加工的首选设备。

Characteristics 特点

1. Use hydraulic lifting for material handling, and automatic tension control system for unwinding,
2. Side gluing uses Italy ZATOR.
3. Automatic error correction uses Italy SELECTRA.
4. Paper tube forming device with thumb-cut fuction.
5. Automatic stop for having no material.
6. Center clip, drum wheel clamp and drum wheel mechanical finger are all use spider synchronous adjustment mechanical design, which can significantly reduce the adjustment time for replacing size.
7. Use German KEB servo with SICK photoelectric eye, which can accurately tracking the printed material.
8. Equipped with automatic lubrication supply system and jams alarm system.

- 1.原料装卸采用液压升降结构，放卷采用全自动张力控制。
- 2.边胶采用意大利ZATOR。
- 3.纠偏采用意大利SELECTRA,国内简称意大利ST
- 4.纸筒成型器包含拇指切功能(位于成型模板下方)
- 5.无料检测自动停机
- 3.中心夹指，鼓轮夹具，和鼓轮机械指皆使用蛛式同步调整机械设计，可大幅减少更换尺寸的调机时间。
- 7.采用德国KEB伺服搭配德国SICK光电，精确跟踪印刷材料。
- 8.配备自动润滑供应系统，堵塞报警系统。

Precision
Efficiency

Main Technical Parameters 主要技术参数

Model	型号	CY-290	CY-460
Bag length	制袋长度	260-533mm	260-533mm
Bag width	制袋宽度	120-290mm	220-460mm
Bottom Size	底部宽度	60-160mm	60-160mm
Paper Thickness	纸张克重	60-150gsm	60-150gsm
Maximum Roll Width	最大纸卷宽度	320-900mm	600-1300mm
Max Paper Roll Diameter	放料最大直径	1300mm	1300mm
Material Core Diameter	纸芯内直径	76mm	76mm
Max. Production Speed	最大制袋速度	200pcs/min	180pcs/min
Total Power	功率	15kw	15kw
Machine Weight	机器重量	8500kg	10000kg
Machine Size(LxWxH)	机器尺寸	8600x2500x1800mm	8600x3000x1800mm



CY-290 CY-460

AUTOMATIC ROLL TO SQUARE BOTTOM PAPER BAG MAKING MACHINE

全自动卷筒方底纸袋机

European CE Certificate
ISO9001:2000



概述

CY-290/460 型可调式卷筒方底纸袋机，它具有速度快、生产效益高、调节范围大的优点。此设备是将原色或印刷好的卷筒纸由本机一次完成侧边上胶、折叠成微、纸筒切断、底部涂胶、袋底成型、出袋，整机由计算机中央控制系统控制、触摸屏显示，伺服电机控制纸袋长短，可生产多种规格纸袋，是纸袋生产加工的首选设备。

Introduction

CY-290/460 type adjustable roll to square bottom paper bag making machine, has the advantages of high speed, high production efficiency and wide adjustment range. It is designed to manufacture square bottom paper bags from paper roll in blank or printed, and can complete side gluing, tube forming, cutting, bottom impressing, bottom gluing, bottom forming and final product output within one time. Controlled by PLC system, equipped with touch screen and servo motor for bag length control, this machine can produce a variety of specifications paper bags. It is an ideal equipment for making paper bag for foodstuff bag or shopping bag.

主要特点

- 原料装卸采用液压升降结构，放卷采用全自动张力控制。
- 边胶采用意大利 ZATOR。
- 纠偏采用意大利 SELECTRA，国内简称意大利 ST。
- 纸筒成型器包含拇指切功能（位于成型模板下方）。
- 无料侦测自动停机。
- 中心夹指，鼓轮夹具，和鼓轮机械指皆使用蛛式同步调整机械装置，可大幅减少更换尺寸的调机时间。
- 采用德国 KEB 伺服搭配德国 SICK 光电，精确跟踪印刷材料。
- 配备自动润滑供应系统，堵塞报警系统。

Characteristics

- Use hydraulic lifting for material handling, and automatic tension control system for unwinding.
- Side gluing uses Italy ZATOR.
- Automatic error correction uses Italy SELECTRA.
- Paper tube forming device with thumb-cut function.
- Automatic stop for having no material.
- Center clip, drum wheel clamp and drum wheel mechanical finger are all use spider synchronous adjustment mechanical design, which can significantly reduce the adjustment time for replacing size.
- Use German KEB servo with SICK photoelectric eye, which can accurately tracking the printed material.
- Equipped with automatic lubrication supply system and jams alarm system.



机器参数

SPECIFICATION

型号	Model	CY-290	CY-460
纸张宽度	Paper Roll Width	320-900mm (12.60"-36.61")	600-1300mm (23.62"-51.18")
纸筒长度	Tube Length	260-533mm (10.24"-20.99")	260.4-533.4mm (10.25"-21")
纸袋宽度	Bag Width	120-290mm (4.72"-11.42")	220-460mm (8.66"-18.11")
底部宽度	Bottom Size	60-160mm (2.36"-6.30")	60-160mm (2.36"-6.30")
纸张克重	Paper Thickness	60-150gsm	60-150gsm
放料最大直径	Max. Paper Roll Diameter	φ1300mm (51")	φ1300mm (51")
纸芯内直径	Material Core Diameter	φ76mm (2.99")	φ76mm (2.99")
最大制袋速度	Max. Production Speed	200pcs/min	180pcs/min
功率	Total Power	15kw	15kw
机器重量	Machine Weight	8500 kg	10000kg
机器尺寸	Machine Size (LxWxH)	8600mm×2500mm×1800mm	8600mm×3000mm×1800mm

CY-180

Automatic Square Bottom Paper Bag Making Machine

全自动方底纸袋机

Introduction 概述

the machine can produce the square bottom paper bag in conjunction with overseas advanced technology. The machine has many advantages such as high speed, high productive efficiency and wide-range adjustment. Automatic raw material feeding, automatic errors correct system and tension control, all these operational procedures are controlled by PLC. This is ideal equipment for producing varies kinds of paper bags such as food paper bags; cosmetics handle paper bags. ect.

本厂吸取国内外先进技术，最新研制的一次性成型方底纸袋机。本机具有速度快，生产效率高，调节范围大的优点。整个工艺流程由人机界面PLC完成，全自动上料，光电纠偏、张力控制，是目前国内外生产食品纸袋，化妆品手提袋和各种副食品纸袋的理想设备。

Characteristics 特点

1. Equipped with servo system with photocell for correction, tracking the printed material accuracy.
2. The electric control system promotes high speed, high precision motion control and production line. It detects automatically effect of integration and optical fiber.
3. The touch screen display simplifies machine operation.
4. The glue applicator system helos glue to move automatically as machine running.
5. Automatic fault detector and self diagnosis system reduce the chance to damage machine
1. 采用伺服电机及色标跟踪器，精确跟踪印刷材料
2. 运动控制器，通过与光纤的一体化，实现高速和高精度的运动控制，流程检测
3. 采用触摸屏显示，操作功能一目了然，具有较好的人机界面
4. 采用冷喷胶系统，胶水量随机械运转速度自动调节
5. 本机配有堵纸探测器，堵塞会自动报警，避免由于堵纸而损坏机器。



Main Technical Parameters 主要技术参数

Model	型号	CY-180
Paper bag width	纸袋宽度	80-190mm
Bag bottom size	袋子底部宽	45-100mm
Tube length	纸袋长度	191-371mm
Max roll paper width	最大纸卷宽度	600mm
Diameter of material	最大放卷直径	1,300mm
Machine speed	机器速度	200pcs/min
Paper thickness	纸张厚度	45-120gsm
Main motor	主电机	15KVA
Air pressure	空气压力	690KPA
Machine weight	机器重量	5000kg
Machine size(WxLxH)	机器尺寸	1600x9200x1750mm



CY-B450

Paper Bag Making Machine

纸袋机

Characteristics 特点

1. It is suitable for paper between 40-80gsm.
 2. It can control bag length through human-machine interface.
 3. The PLC system can calculate parameters correctly.
 4. It is equipped with an accurate photocell system.
 5. Cut by the point cutter.
- 1、适合40-80克各种纸张。
2、人机界面调节袋子长度。
3、伺服系统PLC控制范围内袋子的任意长度。
4、精确的色标跟踪系统。
5、用点齿刀打断。

Main Technical Parameters 主要技术参数

Model	型号	CY-B450
Paper weight	纸张克重	40-80g/m ²
Bag length	制袋长度	100-450mm
Bag width	制袋宽度	70-250mm
The width of paper roll	卷筒纸放料宽度	260-720 mm
Bag speed	纸袋速度	50-600pcs/min
Paper bag insert	纸袋插边	20-120mm
Machine power	整机功率	15kw
Machine total weight	整机重量	3000kg
Overall dimension(WxLxH)	外形尺寸	2000×6500×1700mm



ZXCY-750

Automatic High Speed Point Tooth Food Paper Bag Making Machine

全自动高速食品点齿纸袋机



Characteristics 特点

1. It is suitable for paper between 40-80gsm.
2. It can control bag length through human-machine interface.
3. The PLC system can calculate parameters correctly.
4. It is equipped with an accurate photocell system.
5. Cut by the point cutter.

- 1、适合40-80克各种纸张
- 2、人机界面调节袋子长度
- 3、伺服系统PLC控制一定范围内袋子的任意长度
- 4、精确的色标跟踪系统
- 5、采用点齿刀打断

Main Technical Parameters 主要技术参数

Model	型号	ZXCY-750
Paper weight	纸张克重	40-80g/m ²
Bag length	制袋长度	150-750mm
Bag width	制袋宽度	80-320mm
Paper bag insert	纸袋插边	20-120mm
The width of paper roll	卷筒纸放料宽度	260-1000mm
Bag speed	制袋速度	20-300pcs/min
Machine power	整机功率	15kw
Machine total weight	整机重量	4000kg
Overall dimension(WxLxH)	外形尺寸	2100x7600x1700mm



ZXCY-400

Automatic High Speed Point Tooth Food Paper Bag Making Machine

全自动高速食品点齿纸袋机

Characteristics 特点

- 1.It is suitable for paper between 40-80gsm.
- 2.It can control bag length through human-machine interface.
- 3.The PLC system can calculate parameters correctly.
- 4.It is equipped with an accurate photocell system.
- 5.Cut by the point cutter.

1. 适合40-80克各种纸张
2. 人机界面调节袋子长度
3. 伺服系统PLC控制一定范围内袋子的任意长度
4. 精确的色标跟踪系统
5. 采用点齿刀打断



热熔胶机
Hot Melt Glue
Machine

Main Technical Parameters 主要技术参数

Model	型号	ZXCY-400
Paper weight	纸张克重	40-80g/m ²
Tube length	纸袋长度	120-400mm
Bag width	制袋宽度	70-250mm
Paper bag insert	纸袋插边	20-120mm
The width of paper roll	卷筒纸放料宽度	260-720mm
Bag speed	制袋速度	20-200pcs/min
Machine power	整机功率	12kw
Machine total weight	整机重量	3000kg
Overall dimension(WxLxH)	外形尺寸	2100x6000x1900mm



CY-400/650/850

High Speed Food Paper Bag Making Machine

全自动高速食品纸袋制袋机



Characteristics 特点

- 1.It is suitable for paper between 40-80gsm.
 - 2.It can control bag length through human-machine interface.
 - 3.The PLC system can calculate parameters correctly.
 - 4.It is equipped with an accurate photocell system.
1. 适合40-80克各种纸张
 2. 人机界面调节袋子长度
 3. 伺服系统PLC控制一定范围内袋子的任意长度
 4. 精确的色标跟踪系统



Main Technical Parameters 主要技术参数

Model	型号	CY-400	CY-650	CY-850
Paper weight	纸张克重	40-80g/m ²	40-80g/m ²	40-80g/m ²
Bag length	制袋长度	160-420mm	220-650mm	220-850mm
Bag width	制袋宽度	70-260mm	80-300mm	80-350mm
Paper bag insert	纸袋插边	20-120mm	20-120mm	20-120mm
The width of paper roll	卷筒纸放料宽度	260-720mm	260-840mm	260-960mm
Machine speed	制袋速度	60-400pcs/min	60-400pcs/min	60-400pcs/min
Machine power	整机功率	8kw	8kw	8kw
Machine total weight	整机重量	3000kg	4200kg	5200kg
Machine dimension(WxLxH)	外形尺寸	2.1x4.5x1.9m	2.1x5.2m	2.1x5.3x2m

CY/YT

Automatic High Speed Paper Bag Making Machine With Printing Machine In Line

全自动高速食品纸袋制袋机连体印刷机

Main Technical Parameters 主要技术参数

Model	型号	YT-2800	YT-4800
Max.material width	最大材料宽度	800mm	800mm
Max.effective printing width	有效印刷宽度	760mm	760mm
Range of repeat printing length	印刷品长度范围	180~1100mm	180~1100mm
Max.diameter of roll material	卷材最大直径	1000mm	1000mm
Printing speed	印刷速度	5~50m/min	5~50m/min
Plate thickness	版材厚度	2.38mm	2.38mm
Total power	总功率	8kw	8kw
Weight of machine	机器重量	1800kg	2000kg
Machine size	机器尺寸	1.9x2x2.3m	1.9x2.1x1.8m



Main Technical Parameters 主要技术参数

Model	型号	CY-400	CY-650
Paper weight	纸张克重	40-80g/m ²	40-80g/m ²
Bag length	纸袋长度	160-420mm	220-650mm
Bag width	制袋宽度	70-260mm	70-300mm
The width of paper roll	卷筒纸放料宽度	260-720mm	260-840mm
Machine speed	制袋速度	60-400pcs/min	60-400pcs/min
Paper bag insert	纸袋插边	20-120mm	20-120mm
Machine power	整机功率	8kw	8kw
Machine total weight	整机重量	3000kg	4200kg
Machine dimension(WxLxH)	外形尺寸	2.1x4.5x1.9m	2.1x5x2m




SY-400

Mechanical Broken Tip Paper Bag Machine

机械打断式尖底纸袋机

Main Technical Parameters 主要技术参数

Model	型号	CY-400
Paper weight	纸张克重	40-80g/m ²
Bag length	制袋长度	160-420mm
Bag width	制袋宽度	70-260mm
The width of paper roll	卷筒纸放料宽度	260-720mm
Machine speed	制袋速度	60-400pcs/min
Paper bag insert	纸袋插边	20-120mm
Machine power	整机功率	8kw
Machine total weight	整机重量	3000kg
Machine dimension(WxLxH)	外形尺寸	2.1x4.5x1.9m

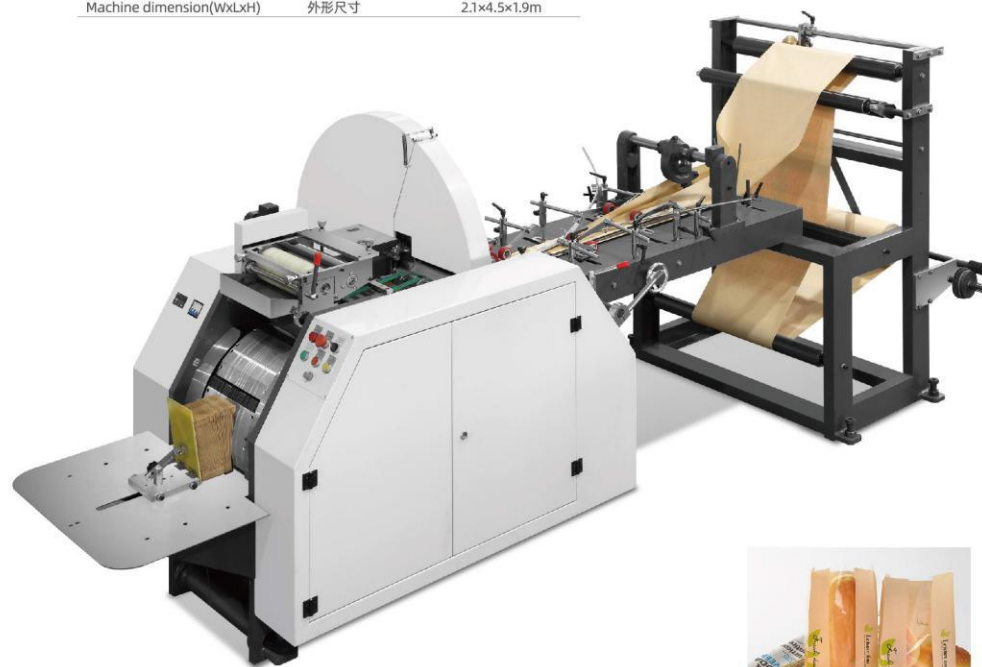

ZXYT-41000

Four Color Flexographic Printing Machine

四色高速柔版印刷机

Characteristics 特点

This machine used o print logo, stickers logo, computer form, bill, aluminum foil, milk kraft paper, battery film, carton paper and so on, printed raw material thickness range to be 40-200g/m². Printing machine functional diversification, can do double-face print, adhesive sticker peeling print, UV glazing, indentation, die cut, coating, gold stamping, slitting and so on technology process.

This is ideal printing equipment for wine package, cigarette box, medicine box, make-up box, milk box, juice box, carton package (logo, box, bag, carton)

本机主要用于40-300g/m²卷筒纸的印刷，可印刷产品类型包括商标、不干胶标签、电脑表格、票据、铝箔、薄膜、牛奶卡纸、电池膜、纸箱预印等。印刷机功能配置灵活，可连线实现双面印刷、不干胶剥离印刷、UV上光、压凹凸、模切、覆膜、烫金、分切等工艺过程。是酒类、香烟类、医药类、化妆品类、牛奶包、果汁包类，纸箱包装（商标、盒、袋、箱等）的理想印刷设备。



Main Technical Parameters 主要技术参数

Model	型号	ZXYT-41000
Maximum paper width	最大纸幅宽度	1015mm
Maximum printing width	最大印刷宽度	1000mm
Printing repeat	印版覆叠长度	279.4-660mm
Maximum unwinder diameter	最大放卷直径	1524mm
Maximum rewinder diameter	最大回收卷直径	1524mm
Gearing	齿轮规格	1/8CP, 齿距3.175mm
Maximum mechanical speed	最大机器速度	150m/min
Drive	驱动电机	11KW
Lubricating system	润滑系统	Automatic 自动润滑系统
Control panel	操作控制台	In the front of the press 设于印刷机组前
Air pressure	空气压力要求	100PSI (0.7Mpa)
Power requirement	供电需求	380VAC3ph 相50HZ赫兹
Suitable material	适印材料	40-200gsm paper, Film, non-woven fabric, etc 纸张印刷、薄膜、无纺布等
Machine color	机器颜色	grey and white灰白色

Two Color

Overlapping Type Synchronous Belt High Speed Printing Machine

2色重叠式同步带高速印刷机



Main Technical Parameters 主要技术参数

Max. Width of Substrate(mm)	最大材料宽度	600	800	1000
Max. Printing Width(mm)	最大印刷宽度	560	760	960
Printing materials	合适的印刷材料	20-350g的纸和膜		
Printing Speed (m/min)	最大印刷速度	120m/min	120m/min	120m/min
Plate thickness	版材厚度	1.7-3.4	1.7-3.4	1.7-3.4
Weight of machine	整机重量	2000	2200	2500
Machine size	外形尺寸	4.3x1.8x2.6m	4.3x2x2.6m	4.3x1.8x2.6m

Four Color

Overlapping Type Synchronous Belt High Speed Printing Machine

4色重叠式同步带高速印刷机

Characteristics 特点

- 1-The machine use synchronous belt working, low noise, And it can usefully control the machine on and off speed change, setting the color be accurate.
- 2-Machine rewinder is hydraulic and pneumatic control, and with friction winder, Make the material more tight and more smooth.
- 3-Machine unwinder is with EPC and hydraulic, no need lift the material by manual.
- 4-Machine is use ydraulic up and down, printing gear is helical gear.
- 5-Machine is controlled by inverter.
- 6-Machine speed:120meter/min. Printing speed:8-100meters /min.
- 7-The machine will automatic alarm before the machine start.

- 1、本机型采用同步带传动，低噪音，有效控制了开机与关机时线速度的变化，使套色精度更准。
- 2、收料为液压与气动控制，并带摩擦式收卷，使卷径更紧凑，更平整。
- 3、放卷带纠偏为液压式，不需要人工抬
- 4、液压起落版，印版辊齿轮为斜齿。
- 5、主机为变频控制
- 6、机械速度每分钟120米，印刷速度80-100米每分钟。
- 7、开机前自动报警。



Main Technical Parameters 主要技术参数

Max. Width of Substrate(mm)	最大材料宽度	600	800	1000
Max. Printing Width(mm)	最大印刷宽度	560	760	960
Printing materials	合适的印刷材料	20-350g的纸和膜		
Printing Speed (m/min)	最大印刷速度	120m/min	120m/min	120m/min
Plate thickness	版材厚度	1.7-3.4	1.7-3.4	1.7-3.4
Weight of machine	整机重量	4000	4500	5000
Machine size	外形尺寸	5.3x1.8x2.6m	5.3x2x2.6m	5.3x2.2x2.6m

CY-450


Middle Sealing Paper Bag Making Machine

中封纸袋机

Characteristics 特点

The machine is the latest design of our company's products. It can make paper bags with laminated film. All the operation procedures are controlled by PLC. The machine has many advantages such as easy to operate, firm sealing, perfect output. This machine is an ideal machine for producing Air-sickness bags, Train sickness bags and various kinds of sickness bags.

该纸袋机是我公司专为采用淋膜纸、纸塑复合等材料为基材的最新开发的专用全自动高速制袋机。该机采用人机界面，PLC系统控制完成，操作简便，封边处热合强度高，产品平整，外形挺括美观，是航空、清洁袋的最佳制袋设备。

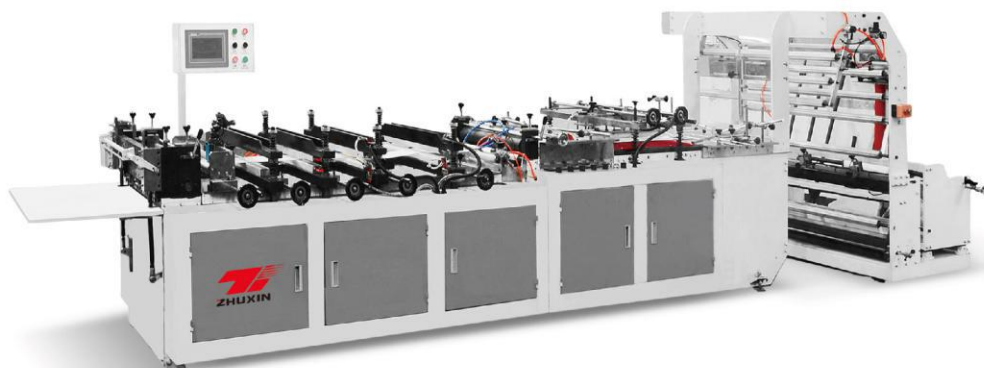

Main Technical Parameters 主要技术参数

Model	型号	CY-450
Paper bag width	纸袋宽度	70-450mm
Paper bag length	纸袋长度	70-600mm
Speed	机器速度	30-80pcs/min
Machine weight	机器重量	2000kg
Gusset width	插边宽度	0-60mm
Paper weight	纸张克重	30-100g
Film thickness	覆膜厚度	10-50micron
Air pressure	气压	4MPa
Machine size(WxLxH)	机器尺寸	1200x6500x1600mm
Main motor power	主电机功率	2.2kw
Heating power	加热功率	10kw



FQB-1300W

Horizontal Type Automatic Slitting Machine

卧式高速自动分切机

Characteristics 特点

This machine is suitable for separating and cutting such various roll materials as BOPP, PET, CPP, CPE, PVC, aluminium foil and paper, ect. It can cut edge and materials according to different requirements during production.

该机适用于BOPP、PRT、CPP、CPE、PVC、铝箔纸张等各种卷状材料的分条，在生产过程中根据不同需要对材料进行切边、分切等。



Main Technical Parameters 主要技术参数

Model	型号	FQB-1300W
Maximum width	分切最大宽度	1300mm
Maximum Unwinder Diameter	放料最大直径	1000mm
Maximum Rewinder Diameter	收料最大直径	600mm
Cutting Width	分切宽度	30-1300mm
Inner Diameter	内芯直径	76mm
Cutting thickness	分切厚度	10-75um (Flat knife平刀) 10-350um (Diskknife圆刀)
Separating and cutting speed	分切最快速度	200m/min
Deviating-rectifying error	纠偏误差	+0.3mm
Total power	总功率	4.8kw
Weight	机器重量	2800kg
Dimension	机器尺寸	3000x2750x1520mm